

WAAS CH 52205 W01A	APCH CRS 010°	Rwy Idg 9318 TDZE 261 Arpt Elev 280
---------------------------------	------------------	--

- (USAF)

RNAV (GPS) Z RWY 1L

JOINT BASE ANDREWS (ANDREWS AFB) (KADW)

DME/DME RNP-0.3 NA

T * When ALS inop, increase RVR to 40, vis to $\frac{3}{4}$.
When TDZ/CL lights inop, increase RVR to 24.
** When ALS inop increase vis to 1 $\frac{1}{4}$ miles.

ALSF-2

MISSED APPROACH: Climb to 2500 direct EGUDE and hold.

ATIS
133.675 251.05

POTOMAC APP C
128.0 335.5

TOWER
18.4 349.0

GND CON
121.8 275.8

CLNC DEL
127.55 285.475

CPDLC

*** When ALS inop increase CAT
AB RVR to 55, vis to 1 mile;
CAT CDE vis to 1 1/4 miles.



**** Circling not authorized
W of Rwy 1L-19R.

For uncompensated
Baro-VNAV systems,
Procedure NA below -15°C
(5°F) or above 52°C (125°F).

MISSED APPROACH

HOLD 2500

RADAR
required for
holding
above 4000
or > 230
KIAS.

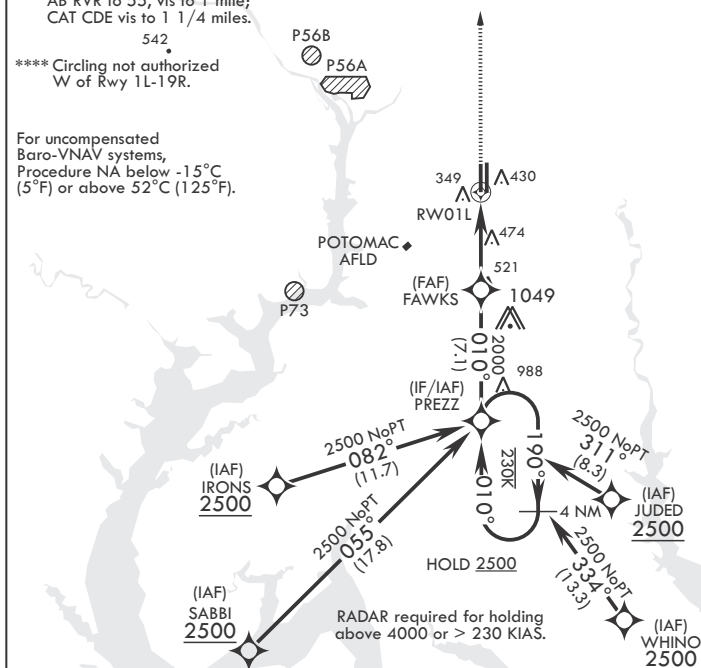

EMERG SAFE ALT 100 NM 6200




VGSI and RNAV glidepath
not coincident (VGSI Angle
3.00/TCH 72).


PREZZ Holding Pattern

ELEV 280

E 261

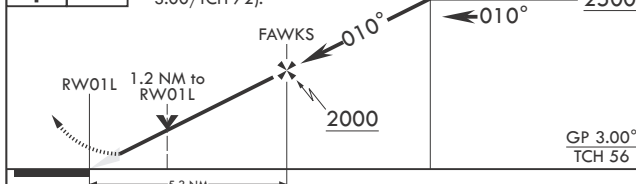

CATEGORY	A	B	C	D	E
LPV DA*	461/18		200	(200-½)	
LNAV/VNAV DA**	687/40		426	(500-¾)	
LNAV MDA***	700/24	439 (500-½)	700/40	439	(500-¾)
C CIRCLING****	780-1	500 (500-1)	780-1½ 500 (500-1½)	840-2	560 (600-2)

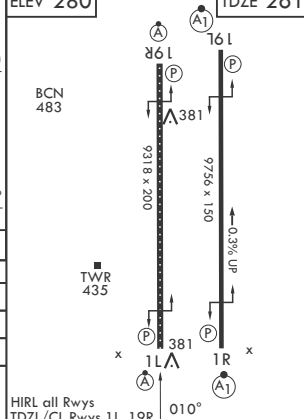

CAMP SPRINGS, MARYLAND

38°49'N - 76°52'W JOINT BASE ANDREWS (ANDREWS AFB) (KADW)

Amdt 5 18MAY23

RNAV (GPS) Z RWY 1L

NE-3, 12 JUN 2025 to 10 JUL 2025

NE-3, 12 JUN 2025 to 10 JUL 2025