

WAAS
CH **45527**
W28A

APP CRS
281°

Rwy Ldg
TDZE
Apt Elev
9708
1134
1203

RNAV (GPS) Y RWY 28C

PITTSBURGH INTL (PIT)

RNP APCH - GPS

⚠

Circling Rwy 14 NA at night. Rwy 28C helicopter visibility reduction below RVR 4000 NA.

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.

⚠

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations.

⚠


Use of FD or AP required during simultaneous operations.

MISSED APPROACH:

Climb to 4000 direct EPONE and on track 220° to HLG

VOR/DME and hold.

D-ATIS ARR 127.25 DEP 135.9	PITTSBURGH APP CON 123.95 360.8	PITTSBURGH TOWER 128.3 291.7	GND CON SOUTH 121.9 348.6 NORTH 127.8 348.6	CLNC DEL 126.75 353.7
---	---	--	---	---------------------------------

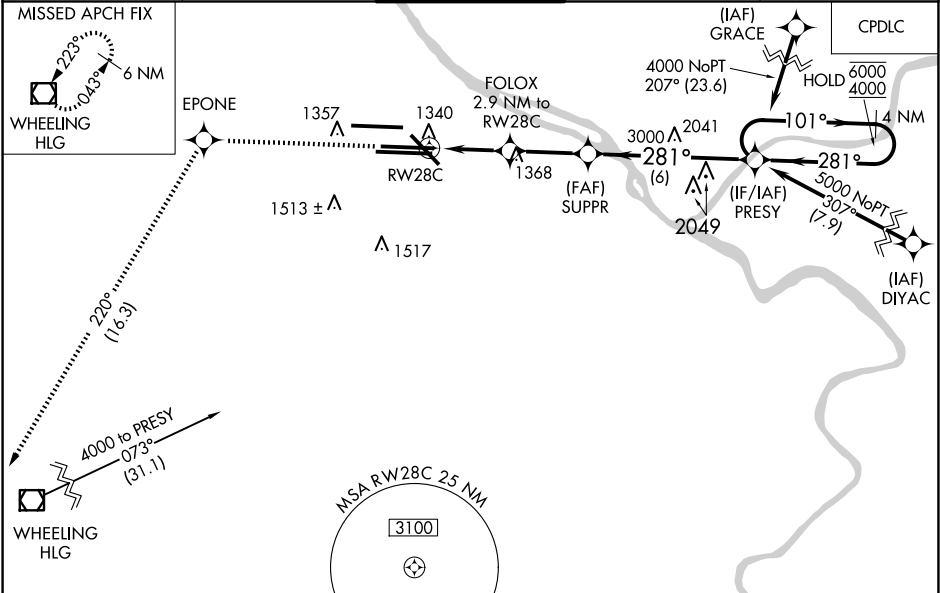

ELEV 1203	D	TDZE 1134
------------------	----------	------------------

4000

↑

EPONE

tr 220°

HLG

⬡

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 43).

4 NM Holding Pattern

FOLOX 2.9 NM to RWY 28C

1.3 NM to RWY 28C

1.6 NM

2.8 NM

6 NM

3000

2100

3000

101°

281°

6000

4000

GP 3.00° TCH 50

CATEGORY	A	B	C	D
LPV DA	1384/40 250 (200-¾)			
LNAV/VNAV DA	1544/60 410 (400-1¼)			
LNAV MDA	1600/55 466 (400-1)		1600-1¾ 466 (400-1¾)	
☒ CIRCLING	1700-1 497 (500-1)		1880-2 677 (700-2) 1880-2¼ 677 (700-2¼)	