

WAAS CH 86910 W16D	APP CRS 164°	Rwy Idg 8500 TDZE 415 Apt Elev 433
--	------------------------	---


RNAV (GPS) Y RWY 16R

SEATTLE-TACOMA INTL (SEA)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 16L. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2
MISSED APPROACH: Climb to 900 then climbing right turn direct ZERLI to cross RWY 16R at 2000 and hold.

D-ATIS 118.0	SEATTLE APP CON 133.65 273.45	SEATTLE TOWER 119.9 239.3 (Rwys 16L, 16C, 34C, 34R) 120.95 239.3 (Rwys 16R, 34L)	GND CON 121.7	CLNC DEL 128.0	CPDLC
------------------------	---	--	-------------------------	--------------------------	-------

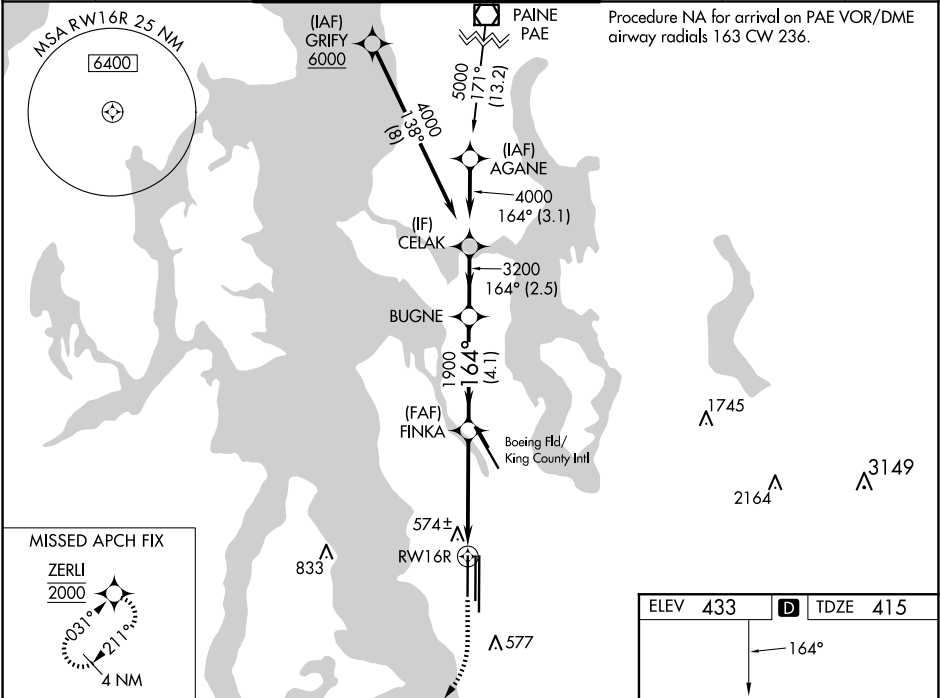

900

ZERLI

2000

VGSI and RNAV glidepath not coincident

(VGSI Angle 3.00/TCH 69).

CELAK

*LNAV only

*1.2 NM to RW16R

FINKA

1900

BUGNE

3200

164°

4000

GP 3.00°

TCH 55

1.2

3.3 NM

4.1 NM

2.5 NM

CATEGORY	A	B	C	D
LPV DA		615/18	200 (200-½)	
LNAV/VNAV DA		760/32	345 (400-⅝)	
LNAV MDA	840/24	425 (500-½)	840/40	425 (500-¾)
CIRCLING	1000-1	567 (600-1)	1000-1½ 567 (600-1½)	1000-2 567 (600-2)

