

WAAS CH 62914 W04A	APP CRS 044°	Rwy Ldg 10701 TDZE 1057 Apt Elev 1077
--	------------------------	--

RNAV (GPS) RWY 4L
WILMINGTON AIR PARK (ILN)

RNP APCH - GPS.




T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.
A For inop ALS, increase LNAV Cats A/B visibility to RVR 5500 and LNAV Cats C/D visibility to RVR 6000. *1800 RVR authorized with use of FD or AP or HUD to DA.

MALSR



MISSED APPROACH:
Climb to 3000 direct
WJZD and hold.

D-ATIS	COLUMBUS APP CON	WILMINGTON TOWER	GND CON	CLNC DEL
124.925	118.85 269.275	119.475	121.6	128.85

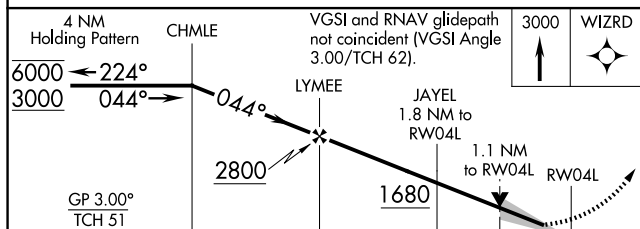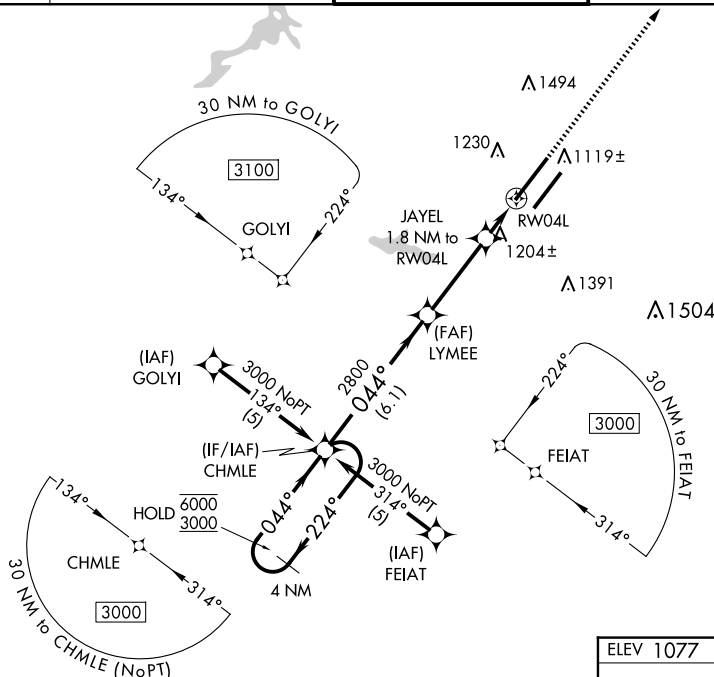

CATEGORY	A	B	C	D
LPV DA *	1257/24 200 (200-½)			
LNAV/ VNAV DA	1505/45 448 (500-¾)			
LNAV MDA	1460/24 403 (400-½)	1460/40 403 (400-¾)		
C CIRCLING	1560-1 483 (500-1)	1860-2¼ 783 (800-2¼)	1860-2½ 783 (800-2½)	