

WAAS

CH 56640

W04A

APP CRS

045°

Rwy Ldg

5498

TDZE

242

Apt Elev

264

RNAV (GPS) RWY 4

THOMASVILLE RGNL (TVI)

▼

▲

Rwy 4 helicopter visibility reduction below 1 SM NA. DME/DME RNP-0.3 NA. Straight-in Rwy 4 NA at night, Circling Rwy 4 NA at night. When local altimeter setting not received, use Valdosta altimeter setting: increase all MDAs 100 feet and all Cat C and D visibilities ⅓ SM.

MISSED APPROACH:
Climb to 2500 direct WEOB and hold.

AWOS-3PT


119.175

VALDOSTA APP CON★

126.6 285.6

UNICOM

123.075 (CTAF) 0

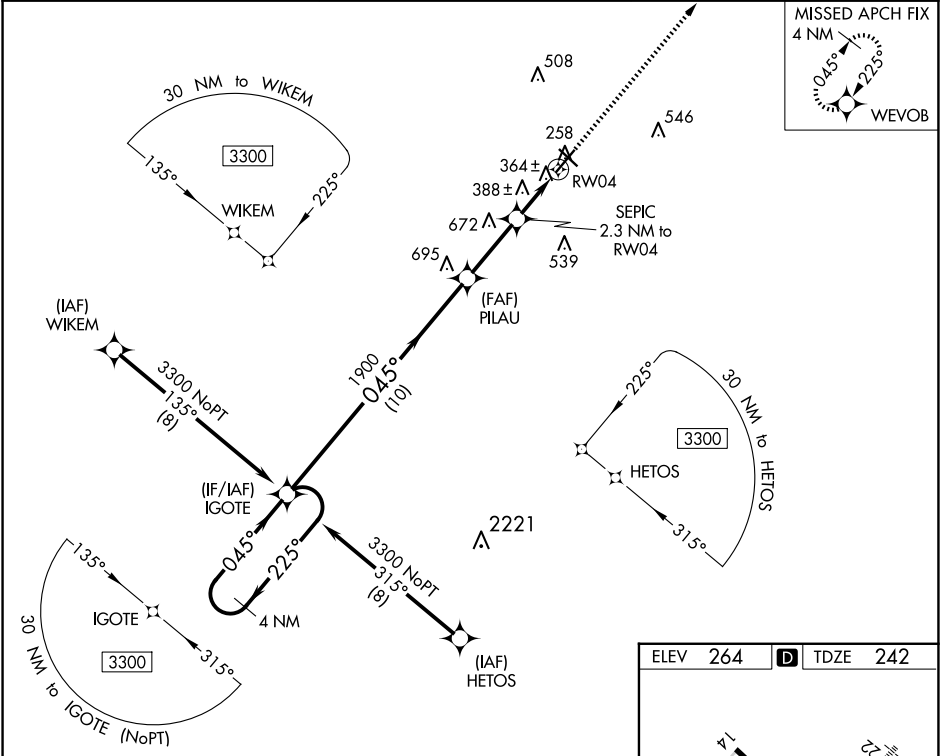

4 NM Holding Pattern

IGOTE

3300

225°

045°

045°

1900

1020

10 NM

2.8 NM

2.3 NM

2500

WEOB

PILAU

SEPIC 2.3 NM to RW04

TCH 54

RW04

CATEGORY	A	B	C	D
LP MDA	620-1 378 (400-1)			
LNAV MDA	640-1 398 (400-1)		640-1½ 398 (400-1½)	
◼ CIRCLING	700-1 436 (500-1)	800-1 536 (600-1)	900-1¾ 636 (700-1¾)	1040-2½ 776 (800-2½)

ELEV 264

TDZE 242

LIRL Rwy 14-32
HIRL Rwy 4-22 0