

WAAS CH 50408 W17A	APP CRS 175°	Rwy ldg 7201 TDZE 1004 Apt Elev 1009
--	------------------------	---

RNAV (GPS) RWY 17

PONCA CITY RGNL (PNC)

RNP APCH - GPS.

▼

▲


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS increase LPV visibility all Cats to ½ SM.

MALSR

AS

MISSED APPROACH: Climb to 2700 direct ZULOT and hold.

ASOS 134.075	KANSAS CITY CENTER 127.8 319.1	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

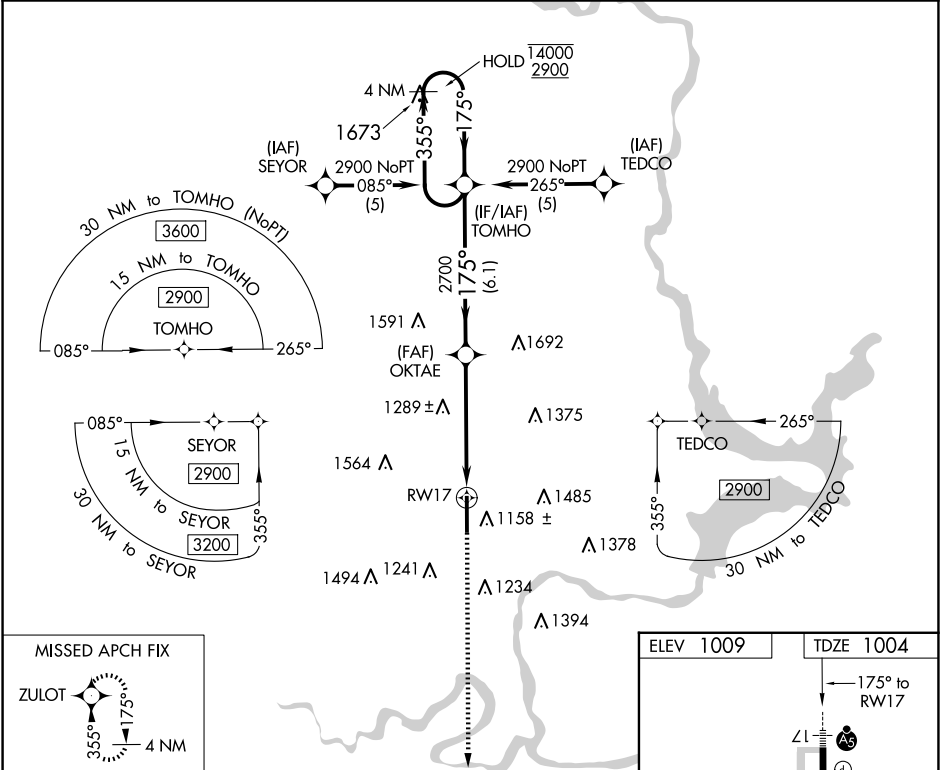

MISSED APCH FIX		ELEV 1009		TDZE 1004	
ZULOT		175° to RW17		ZULOT	
4 NM Holding Pattern		2700		ZULOT	
GP 3.00° TCH 48		1.6 NM to RW17		RW17	
CATEGORY		A		B	
LPV DA		1279-1/2		275 (300-1/2)	
LNAV/VNAV DA		1330-1/2		326 (400-1/2)	
LNAV MDA		1540-1/2 536 (600-1/2)		1540-1 536 (600-1)	
CIRCLING		1540-1 531 (600-1)		1580-1 571 (600-1)	
		1800-2 791 (800-2 1/4)		1880-2 871 (900-2 3/4)	
		HIRL Rwy 17-35 0			