

SPRINGFIELD, MISSOURI

HI-TACAN RWY 20

VORTAC SGF
116.9
Chan 116

APCH CRS
196°

Rwy Idg 7003
TDZE 1262
Arpt Elev 1268

AL-604 [USAF]

SPRINGFIELD-BRANSON NATL (KSGF)

When local altimeter setting not received,
use Monett altimeter setting.

MALS
A4

MISSED APPROACH: Climb to 3000 then right turn via
SGF VORTAC R-206 to BLUE INT/SGF 22 DME and hold.


ATIS
135.125

APP CON
121.1 290.5

TOWER
119.9 257.8

GND CON
121.9 251.15

CLNC DEL
123.675

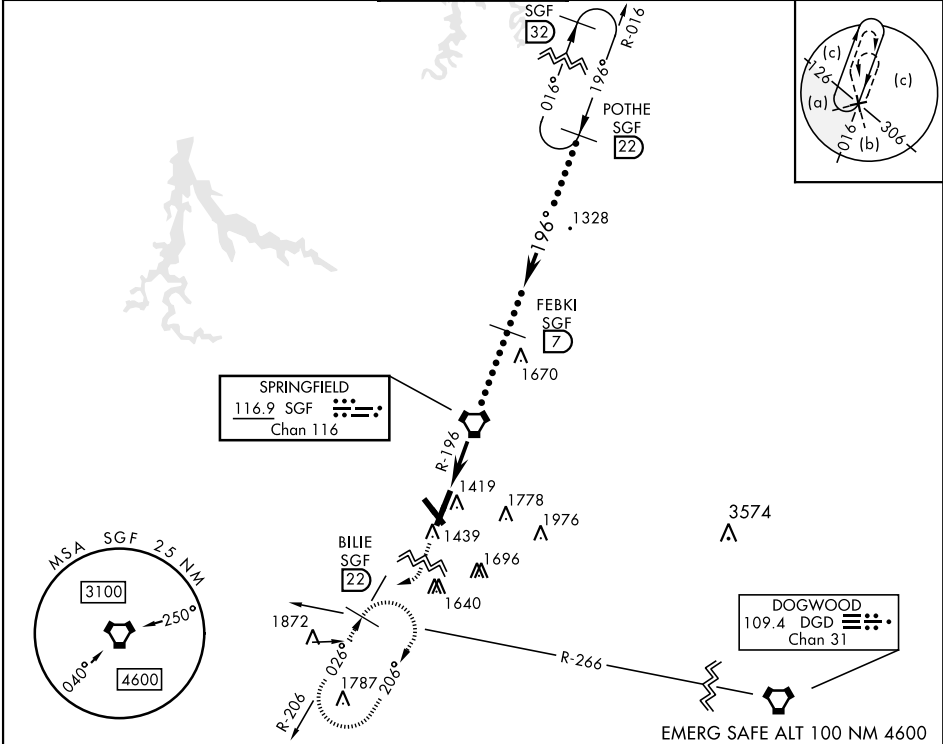

3000

BLIE

SGF

22

VDP NA when using Monett altimeter setting.

FEBKI

7

POTHE

22

15,000

R-196

6.5

5.1

196°

3400

3400

196°

3.02°

TCH 47

6.5 NM

CATEGORY	C	D	E
S-20	1760-1¼ 498 (500-1¼)	1760-1½ 498 (500-1½)	1760-1¾ 498 (500-1¾)
CIRCLING	1820-1½ 552 (600-1½)	1820-2 552 (600-2)	1920-2¼ 652 (700-2¼)

MONETT ALTIMETER SETTING MINIMUMS

S-20	1860-1½ 598 (600-1½)	1860-1¾ 598 (600-1¾)	1860-2 598 (600-2)
CIRCLING	1920-1¾ 652 (700-1¾)	1920-2¾ 652 (700-2¾)	2020-2¾ 752 (800-2¾)

ELEV 1268

TDZE 1262

196° 6.5 NM from VORTAC

1309

8000 X 150

TWR 1361

REIL Rwy 32

HRL Rwy 2-20 and 14-32

HI-TACAN RWY 20

NC-3, 12 JUN 2025 to 10 JUL 2025

NC-3, 12 JUN 2025 to 10 JUL 2025