



WAAS CH 72933 W32A	APP CRS 319°	Rwy Idg TDZE 1268 Apt Elev 1268	8000
--	------------------------	---	-------------

RNAV (GPS) RWY 32
SPRINGFIELD-BRANSON NTL (SGT¹)

⚠ Baro-VNAV and VDP NA when using Monnett altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Monnett altimeter setting and increase all DA 90 feet and all MDA 100 feet; increase LPV all Cats visibility 1/8 mile, LNAV/VNAV all Cats 3/8 mile, LNAV Cats C and D 1/4 mile and Circling Cat C 1/4 mile and Cat D 1/2 mile. DME/DME RNP- 0.3 NA.

MISSED APPROACH:
Climb to 3000 direct JOGPU and hold.

ATIS 135.125	SPRINGFIELD APP CON 124.95 290.5	SPRINGFIELD TOWER 119.9 257.8	GND CON 121.9 251.15	CLNC DEL 123.675
------------------------	--	---	--------------------------------	----------------------------

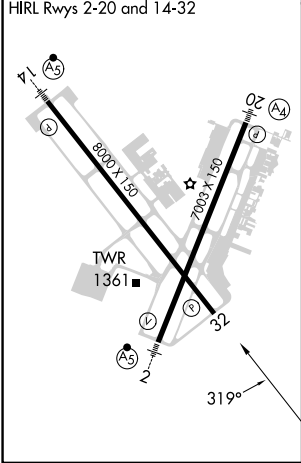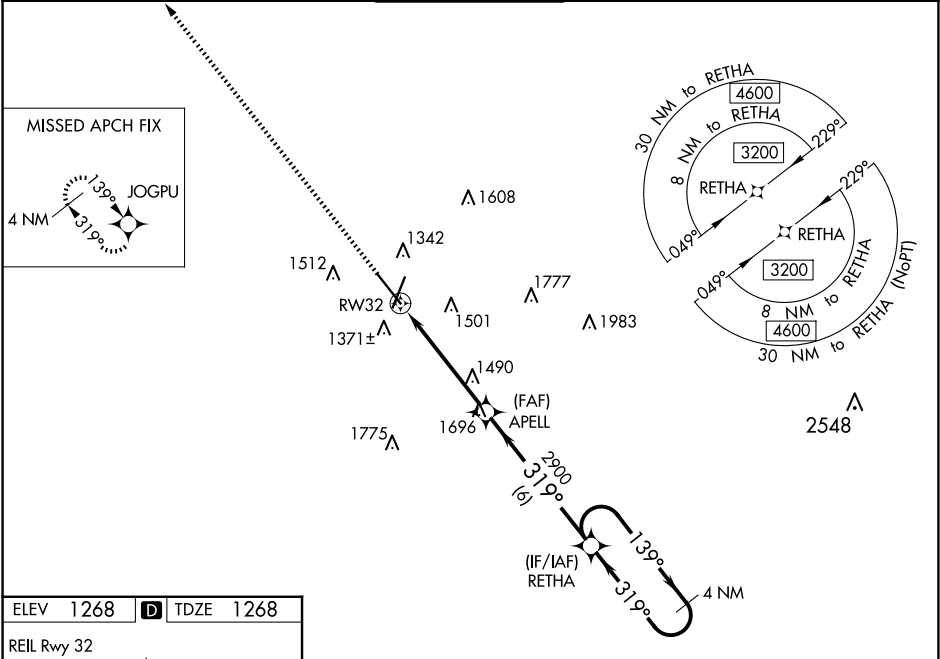

3000 JOGPU		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 35).		4 NM Holding Pattern
* LNAV only.		APELL 2900		RETHA
* 1.4 NM to RW32		2900		139° → 3200
1.4 NM		3.6 NM		← 319°
6 NM		GP 3.00°		TCH 51
CATEGORY	A	B	C	D
LPV DA	1518-1		250 (300-1)	
LNAV/VNAV DA	1660-1 1/4		392 (400-1 1/4)	
LNAV MDA	1740-1 472 (500-1)		1740-1 3/8 472 (500-1 3/8)	
CIRCLING	1760-1 492 (500-1)	1820-1 552 (600-1)	1820-1 1/2 552 (600-1 1/2)	1920-2 652 (700-2)

NC-3, 12 JUN 2025 to 10 JUL 2025

NC-3, 12 JUN 2025 to 10 JUL 2025