

LOC I-HUF <u>109.7</u>	APP CRS 049°	Rwy Idg TDZE Apt Elev	9020 573 589
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 5
TERRE HAUTE RGNL (HUF)


ADF or DME required.

V VDP NA when using Paris altimeter setting. When local altimeter setting not received, use Paris altimeter setting and increase all DA 61 feet and all MDA 80 feet, increase S-LOC 5 Cats C/D visibility to RVR 4500. For inop ALS, increase S-LOC 5 Cat C/D visibility to RVR 5500, when using Paris altimeter setting increase S-ILS 5 all Cats visibilities to RVR 4500 and S-LOC Rwy 5 all Cats visibility ½ SM. **RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Paris altimeter setting.


MALSR

MISSED APPROACH:
Climb to 2300 direct
TTH VORTAC and hold.

ATIS	HULMAN APP CON	HULMAN TOWER	GND CON
127.5 269.375	125.45 339.8	134.725 322.475	121.6 348.6

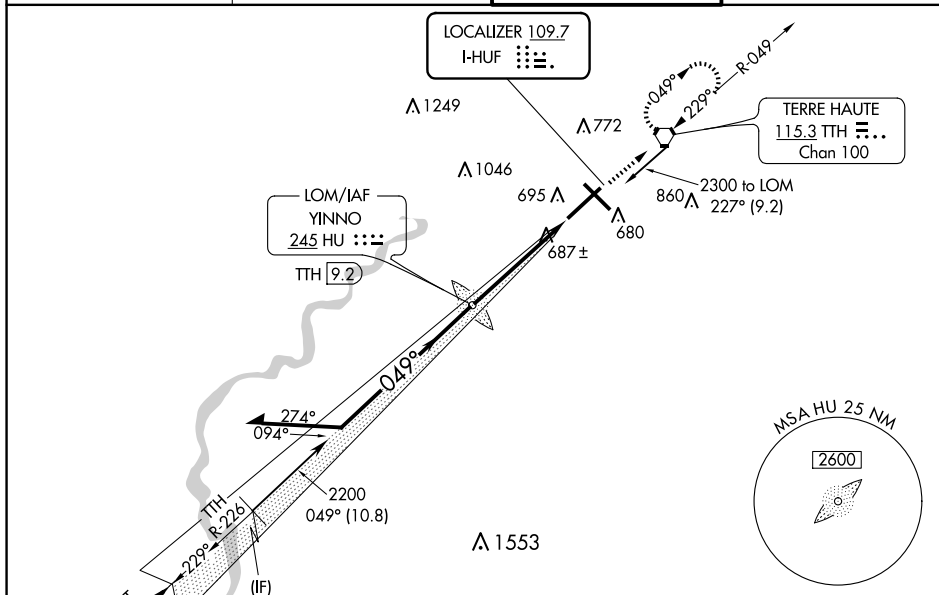

EC-2, 12 JUN 2025 to 10 JUL 2025

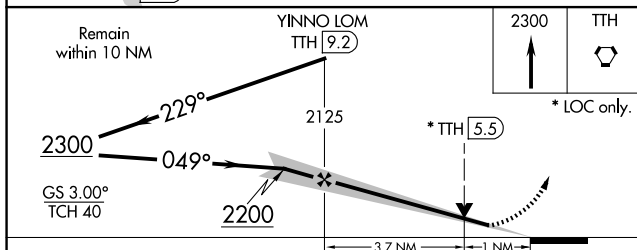

CATEGORY	A	B	C	D
S-ILS 5 **	773/24		200 (200-½)	
S-LOC 5	940/24	367 (400-½)	940/35	367 (400-½)
 CIRCLING	1040-1 451 (500-1)	1040-1 451 (500-1)	1220-1 ³ / ₄ 631 (700-1 ³ / ₄)	1220-2 631 (700-2)

