APP CRS	Rwy Ldg	7011
113°	TDZE	132
	Apt Elev	132

RNAV (RNP) Y RWY 11

LAURENCE G HANSCOM FLD (BED)

RNP AR APCH.

For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C . For inop ALS, increase RNP 0.30 all Cats visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct ZIMOT and hold.

ATIS	BOSTON APP CON	HANSCOM TOWER ★	GND CON	CLNC DEL	UNICOM
124.6	124.4 279.6	118.5 (CTAF) L 257.2	121.7	121.85	122.95

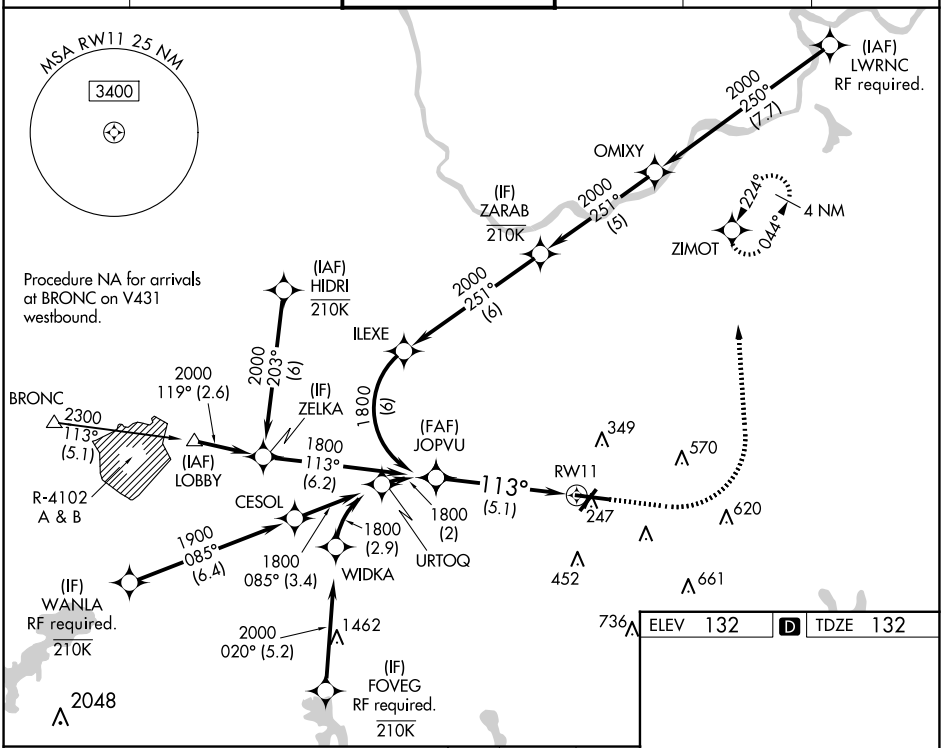

ELEV	132	D	TDZE	132

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 67).

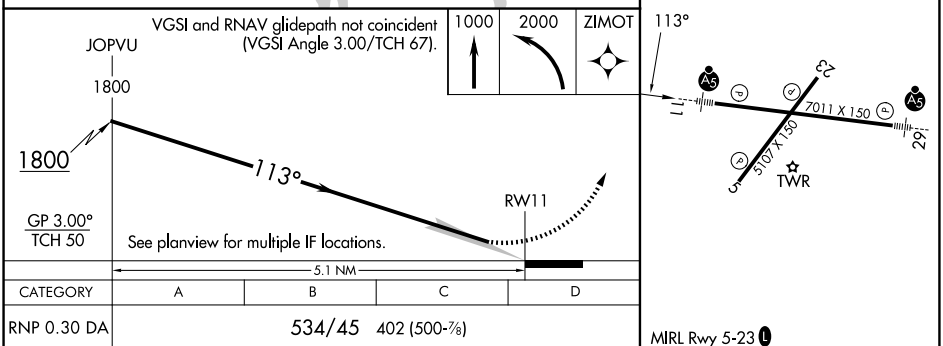

CATEGORY	A	B	C	D
RNP 0.30 DA	534/45 402 (500-⅞)			

MIRL Rwy 5-23 L
HIRL Rwy 11-29 L
REIL Rwys 5 and 23 L

AUTHORIZATION REQUIRED

NE-1, 12 JUN 2025 to 10 JUL 2025

NE-1, 12 JUN 2025 to 10 JUL 2025