

LOC I-LOW <u>110.7</u>	APP CRS 012°	Rwy Idg 8400 TDZE 6649 Apt Elev 6649
----------------------------------	------------------------	---

ILS or LOC RWY 1
YELLOWSTONE (WYS)

ADF required. DME required for MUPDE stepdown fix.

	Obtain local altimeter setting on CTAF, when not received procedure
 NA	NA. Inoperative table does not apply to S-LOC 1 Cat A. For
 -20°C	inoperative MALSR, increase S-ILS 1 all Cats visibility to 2 3/4 mile.

MALSR



MISSED APPROACH: Climb to 9000, then climbing right turn to 10100 direct TARGY LOM and hold.

AWOS-3P


118.1

SALT LAKE CENTER

132.4 338.3


UN|COM

123.0 (CTAF) L

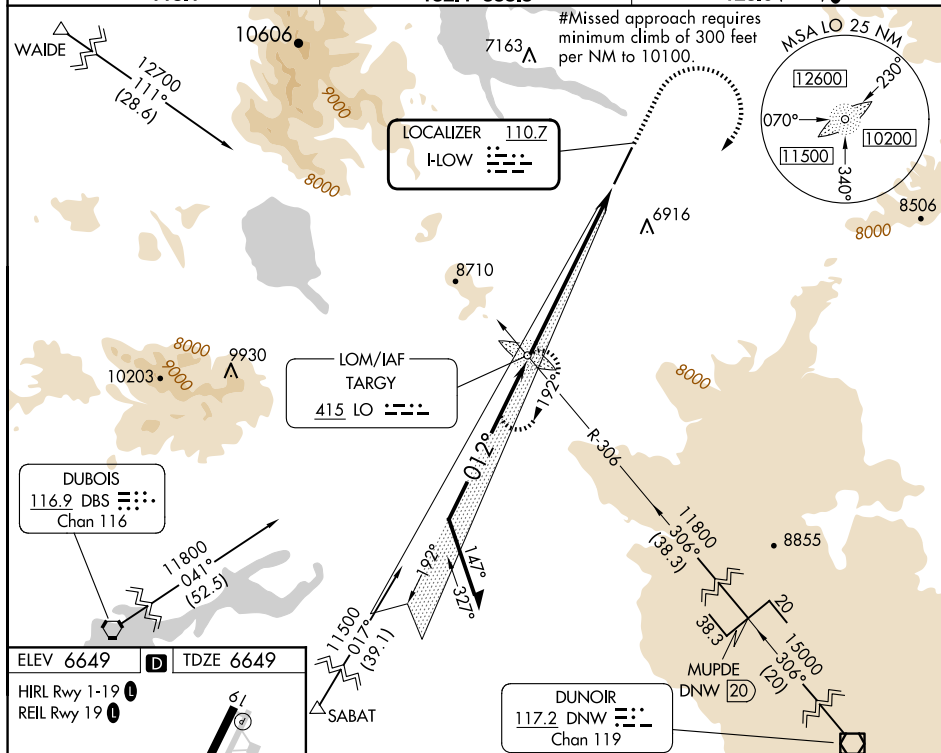

FILEV 6649		TD7E 6649
------------	---	-----------

HIRL Rwy 1-19 **L**
REIL Rwy 19 **L**

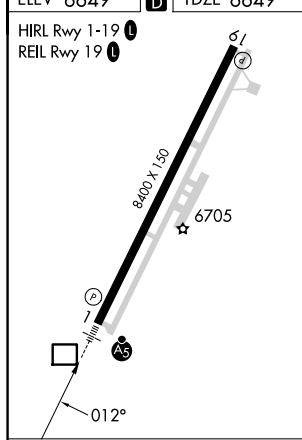

FAF to MAP 6.9 NM

Knots	60	90	120	150	180
Min:Sec	6:54	4:36	3:27	2:46	2:18

Remain within 10 NM

10100

192°

012°

GS 3.00° TCH 50

9600

*9000

LO LOM

8941

VGS/LOC approach with non-coincident glidepaths (VGS Angle 3.00/TCH 50).

9000

10100

TARG

* LOC only

6.9 NM

CATEGORY	A	B	C	D
S-ILS 1#		6849-1½	200 (200-½)	
S-ILS 1		7449-2¼	800 (800-2¼)	
S-LOC 1	7780-1¼ 1131 (1200-1¼)	7780-1 1131 (1200-1)	7780-2½	1131 (1200-2½)
C CIRCLING	7780-1¼ 1131 (1200-1¼)	7780-1½ 1131 (1200-1½)	7780-3 1131 (1200-3)	8020-3 1371 (1400-3)