

APP CRS

Rwy Ldg

8000

186°

TDZg

868

Apt Elev

896

RNAV (RNP) Z RWY 18R

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP AR APCH - GPS. Authorization required. From RANGL or TARZI: RF


ALSF-2

MISSED APPROACH: Climb to 3000 direct BEPEE and on track 269° to AVIEW and hold.

For uncompensated Baro-VNAV systems, procedure NA below -14°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 5500.

ALSF-2

D-ATIS		CINCINNATI APP CON		CINCINNATI TOWER		GND CON	CLNC DEL	CPDLC
ARR	DEP	119.7	363.15 (090°-269°)	118.975	360.85 (RWY 18L/36R)	121.7	127.175	
134.375	135.3	123.875	363.15 (270°-089°)	118.3	(RWYS 18C/36C, 09/27)			
				133.325	(RWY 18R/36L)			

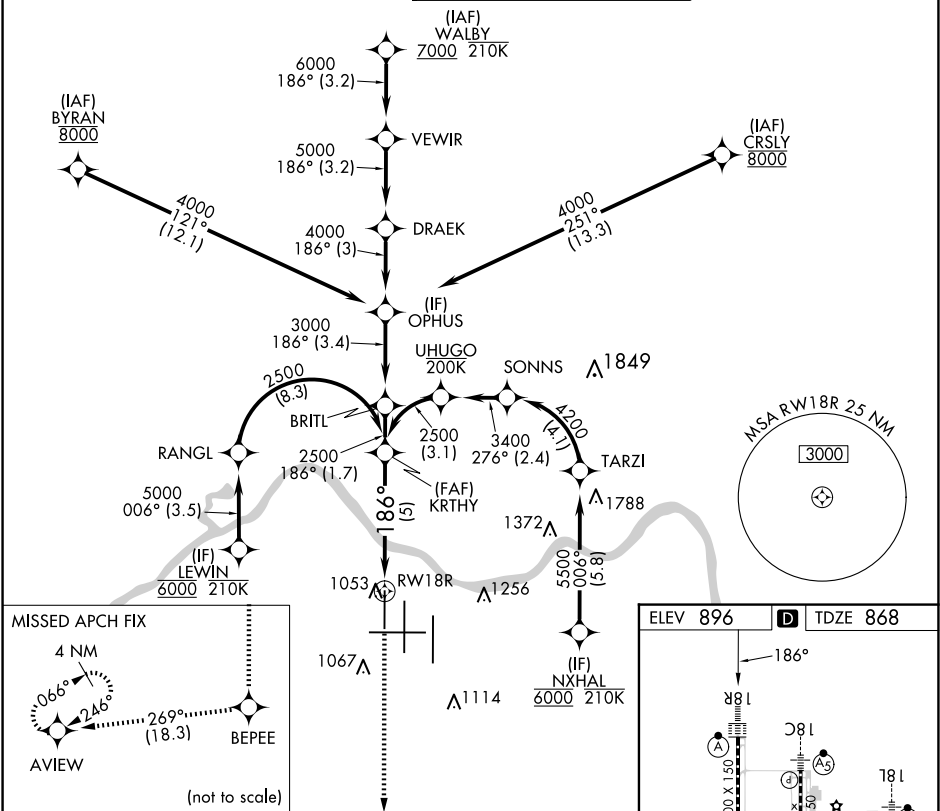

3000

BEPEE

tr

269°

AVIEW

See planview for multiple IF locations.

KRTHY

2500

186°

2500

GP 3.00°

TCH 58

CATEGORY

A

B

C

D

RNP 0.30 DA

1238/35

370 (400-%)

AUTHORIZATION REQUIRED

ELEV 896

D

TDZE 868

The planview diagram shows the RWY 18R, BEPEE, AVIEW, and various navigation aids. It includes a scale bar for 5 NM and a heading of 186°.

HIRL all Rwys

TDZ/CL all Rwys except 27