


WAAS CH 82510 W07A	APP CRS 065°	Rwy Ldg TDZE Apt Elev	4784 319 331
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 7
WATERTOWN INTL (ART)

RNP APCH. For inop ALS, increase LPV, LNAV/VNAV visibilities to ¾ SM and LNAV Cat C/D visibilities to 1¾ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below-18°C or above 54°C.		MALSR 	MISSED APPROACH: Climb to 900 then climbing left turn to 3500 direct NOYAQ and hold.	
ASOS 132.325	KGTB ATIS 119.525	WHEELER-SACK APP CON 124.875 307.125	CLNC DEL 120.8	UNICOM 123.0 (CTAF) 0

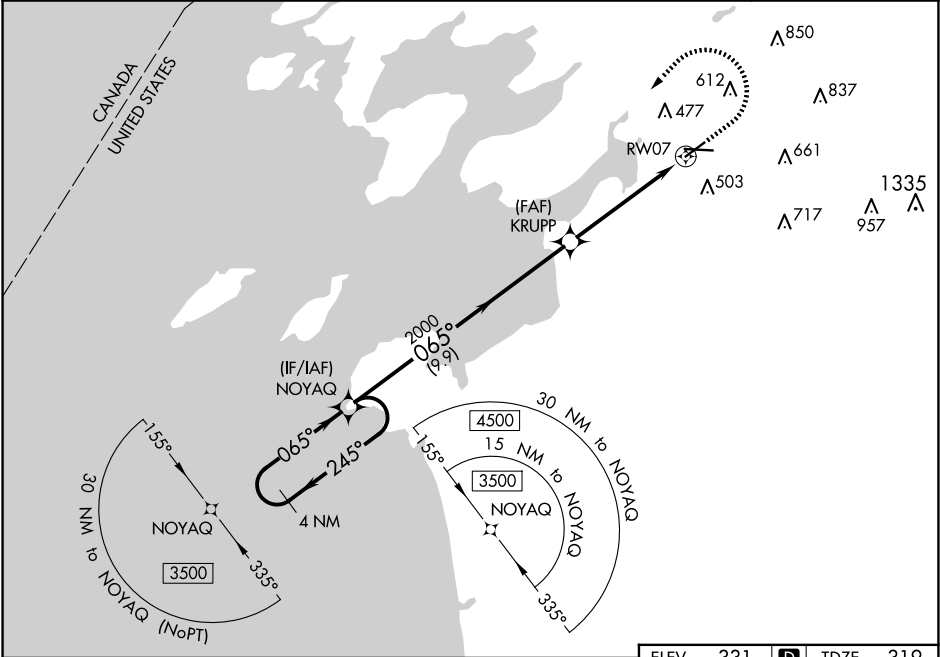

4 NM Holding Pattern		NOYAQ		900 ↑ 3500 ↘ NOYAQ ✦		ELEV 331	TDZE 319
3500 ← 245° → 065°		NOYAQ		* LNAV only			
GP 3.00° TCH 51		KRUPP 2000		* 1.3 NM to RWY 7			
2000		RWY 7					
9.9 NM		3.9 NM		1.3 NM			
CATEGORY		A		B			
LPV	DA	519-½		200 (200-½)			
LNAV/VNAV	DA	578-½		259 (300-½)			
LNAV	MDA	780-½		461 (500-½)			
CIRCLING		960-1		629 (700-1)		HIRL Rwy 7-25 0 MIRL Rwy 10-28 0	
				980-1¾ 649 (700-1¾)		1080-2½ 749 (800-2½)	