

LOC/DME I-CMI

109.1

Chan 28

APP CRS

319°

Rwy Idg

8101

TDZE

750

Apt Elev

755

ILS or LOC RWY 32R

UNIVERSITY OF ILLINOIS/WILLARD (CMI)


⚠

For inop ALS, increase S-LOC 32R Cat C and D visibility to RVR 6000.  
\*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1200 then climbing left turn to 2800 on CMI VORTAC R-297 to LODGE INT/CMI VORTAC 13.2 DME and hold.

|        |                                                         |                    |         |          |        |
|--------|---------------------------------------------------------|--------------------|---------|----------|--------|
| ATIS   | CHAMPAIGN APP CON ★                                     | CHAMPAIGN TOWER ★  | GND CON | CLNC DEL | UNICOM |
| 124.85 | 121.35 285.65 (319°-138°)<br>132.85 290.225 (139°-318°) | 120.4 (CTAF) 229.4 | 121.8   | 128.75   | 122.95 |

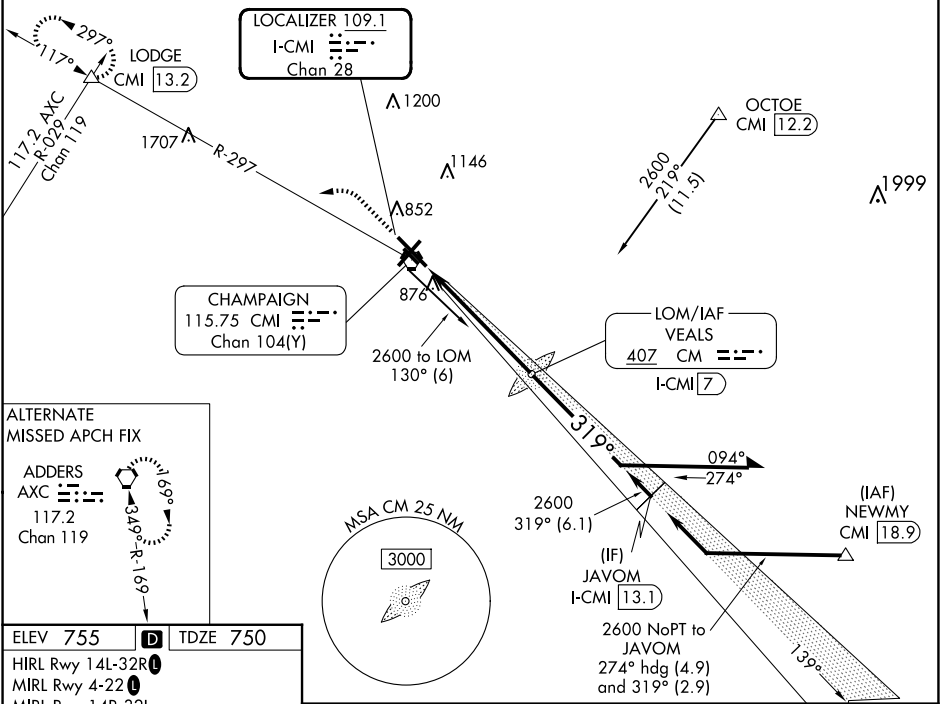

ELEV 755

D

TDZE 750

HIRL Rwy 14L-32R

MIRL Rwy 4-22

MIRL Rwy 14R-32L

FAF to MAP 5.5 NM

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 5:30 | 3:40 | 2:45 | 2:12 | 1:50 |

CHAMPAIGN/URBANA, ILLINOIS

Amdt 14A 25JAN24

|             |              |             |                            |                         |  |  |
|-------------|--------------|-------------|----------------------------|-------------------------|--|--|
| 1200        | 2800         | LODGE       |                            |                         |  |  |
| ↑           | CMI<br>R-297 | △           |                            |                         |  |  |
|             |              |             | CM LOM<br>VEALS<br>I-CMI 7 |                         |  |  |
|             |              |             | Remain<br>within 10 NM     |                         |  |  |
|             |              |             | 2545                       |                         |  |  |
|             |              |             | 139°                       |                         |  |  |
|             |              |             | 2600                       |                         |  |  |
|             |              |             | 319°                       |                         |  |  |
|             |              |             | 2600                       |                         |  |  |
|             |              |             | GS 3.00°<br>TCH 52         |                         |  |  |
|             |              |             | 1.1 NM 4.4 NM              |                         |  |  |
| CATEGORY    | A            | B           | C                          | D                       |  |  |
| S-ILS 32R * | 950/24       |             | 200 (200-½)                |                         |  |  |
| S-LOC 32R   | 1160/24      | 410 (500-½) | 1160/40                    | 410 (500-¾)             |  |  |
| CIRCLING    | 1240-1       | 485 (500-1) | 1500-2¼<br>745 (800-2¼)    | 1500-2½<br>745 (800-2½) |  |  |