

WAAS CH 82746	APP CRS 067°	Rwy Idg TDZE Apt Elev	5031 690 690
-------------------------	------------------------	-----------------------------	---

RNAV (GPS) RWY 7

ALPENA COUNTY RGNL (APN)

RNP APCH - GPS.



▼

▲

Baro-VNAV and VDP NA when using PZQ altimeter setting. Rwy 7 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use PZQ altimeter setting and increase LPV DA to 1007 feet, increase LNAV/VNAV DA to 1039 feet; increase all MDAs 60 feet and LNAV visibility Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 3000 direct MUNCN and hold, continue climb-in-hold to 3000.

ATIS ★	ALPENA APP CON ★	ALPENA TOWER ★	GND CON	UNICOM
120,675 327,05	128,425 379,3	121,35 (CTAF) 0 318,1	121,9 275,8	122,95

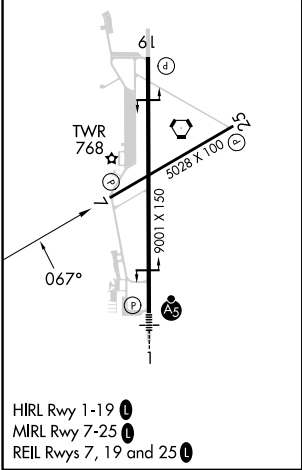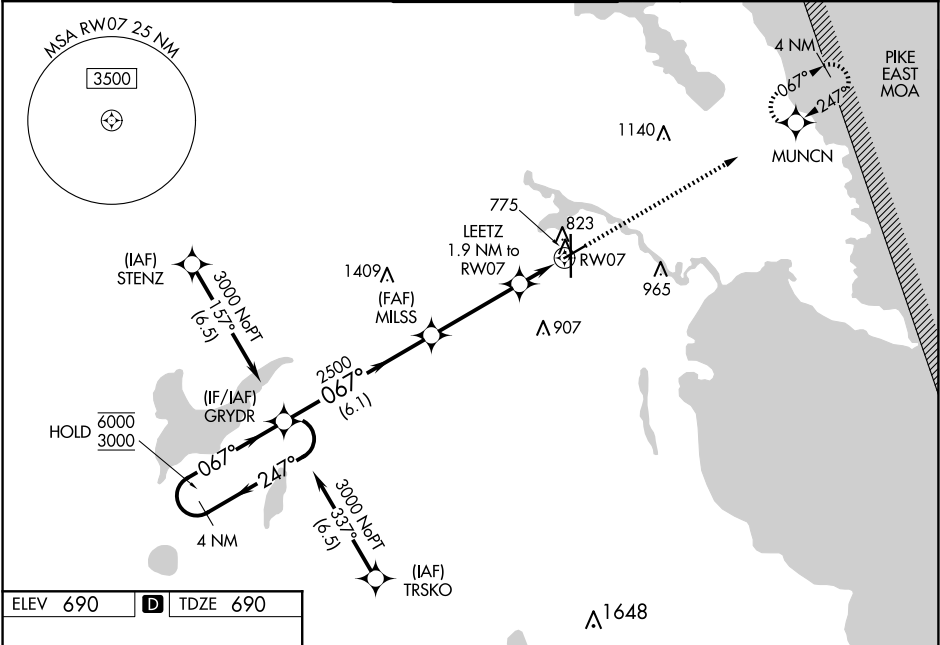

4 NM Holding Pattern GRYDR				VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 49).		3000	MUNCN
6000 ← 247°				067° →		067°	
3000				2500		1340	
GP 3.00° TCH 58				2500		1340	
6.1 NM				3.6 NM		0.8 NM	
CATEGORY				A		B	
LPV DA				952-1		262 (300-1)	
LNAV/VNAV DA				984-1		294 (300-1)	
LNAV MDA				1080-1 390 (400-1)		1080-1½ 390 (400-1½)	
CIRCLING				1140-1 450 (500-1)		1220-1½ 530 (600-1½)	