


WAAS CH 82200 W18A	APP CRS 185°	Rwy Idg TDZE Apt Elev	6107 592 592
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18
PRYOR FLD RGNL (DCU)

⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Huntsville Intl-Carl T Jones Fld altimeter setting: increase LPV DA to 817 and LNAV/VNAV DA to 920 and all visibilities ½ mile. Increase all MDA 40 feet and LNAV Cat C and D visibility ⅓ mile. VDP and Baro-VNAV NA when using Huntsville Intl-Carl T Jones Fld altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F).

MISSED APPROACH:
Climb to 3000 direct
ATHEN and hold.

ASOS 118.375	HUNTSVILLE APP CON* 118.05 239.0	UNICOM 123.075 (CTAF) 0
------------------------	--	-----------------------------------

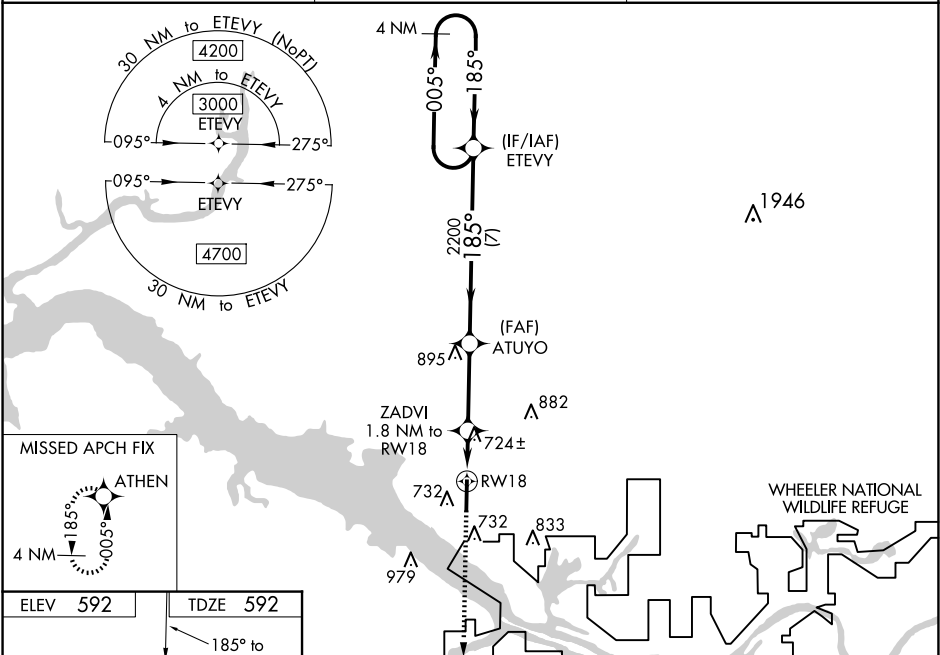

MISSED APCH FIX

ATHEN

4 NM

185°

005°

ELEV 592

TDZE 592

81

185° to RW18

636

36

001 X 019

HIRL Rwy 18-36 0

REIL Rws 18 and 36 0

3000

ATHEN

↑

✦

*LNAV only

ETEVY

4 NM Holding Pattern

005°

←185°

3000

GP 3.00°

TCH 47

ZADVI

1.8 NM to RW18

ATUYO

2200

*1.1 NM to RW18

1180

2200

1.1 NM

0.7

3.1 NM

7 NM

RW18

RW18

185°

185°

CATEGORY	A	B	C	D
LPV DA	792-¾		200 (200-¾)	
LNAV/VNAV DA	895-1		303 (400-1)	
LNAV MDA	980-1	388 (400-1)	980-1⅛	388 (400-1⅛)
CIRCLING	1040-1 448 (500-1)	1060-1 468 (500-1)	1340-2¼ 748 (800-2¼)	1340-2½ 748 (800-2½)

SE-4, 12 JUN 2025 to 10 JUL 2025

SE-4, 12 JUN 2025 to 10 JUL 2025