

WAAS
CH **45602**
W21B

APP CRS
210°

Rwy ldg
TDZE
626
Apt Elev
640

RNAV (GPS) Z RWY 21

CHARLOTTESVILLE-ALBEMARLE (CHO)

RNP APCH.


▼

▲

Baro-VNAV NA when using Staunton/Waynesboro/Harrisonburg altimeter setting.
For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 54°C.
When local altimeter setting not received, use Staunton/Waynesboro/Harrisonburg altimeter setting and increase all DA 130 feet and LPV visibility ½ mile.

MISSED APPROACH: Climb to 1100, then climbing left turn to 4000 direct GVE VORTAC and hold.

ATIS 118.425	POTOMAC APP CON 132.85 323.125	CHARLOTTESVILLE TOWER ★ 124.5 (CTAF) 0 338.275	GND CON 121.9 338.275	UNICOM 122.95
------------------------	--	--	---------------------------------	-------------------------

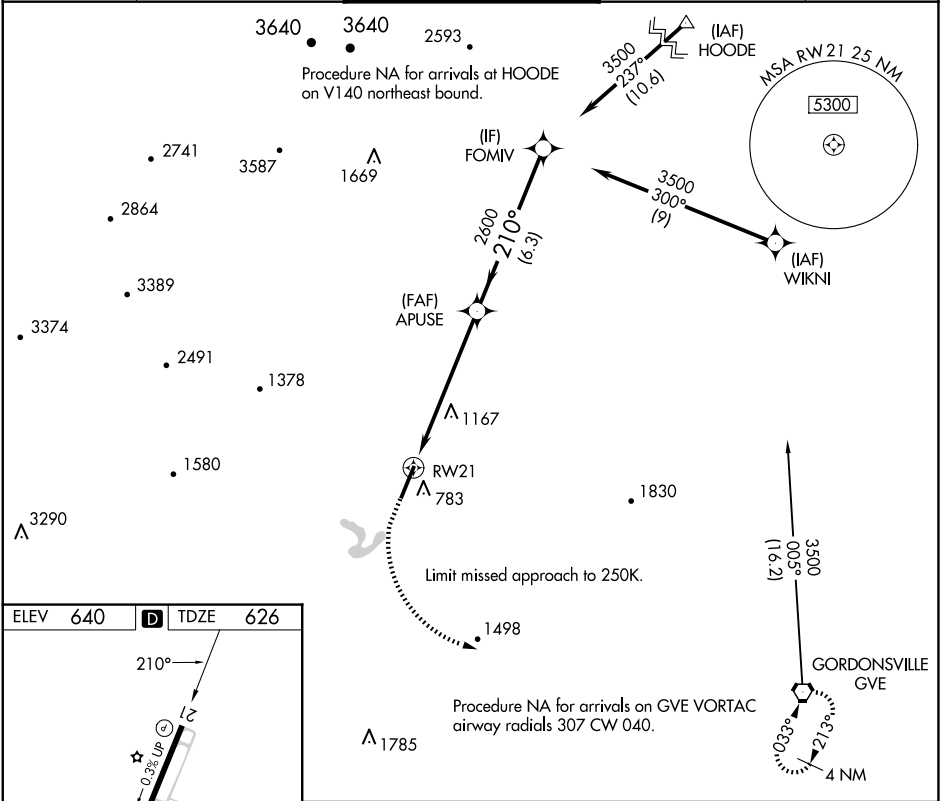

ELEV 640 D TDZE 626

HIRL Rwy 3-21 0
REIL Rwy 21 0

1100
4000
GVE

APUSE
2600
RWY 21
6.1 NM
6.3 NM
FOMIV
3500
2600
210°
GP 3.00°
TCH 50

CATEGORY	A	B	C	D
LPV DA	826-1 200 (200-1)			
LNAV/VNAV DA	1588-4 962 (1000-4)			