
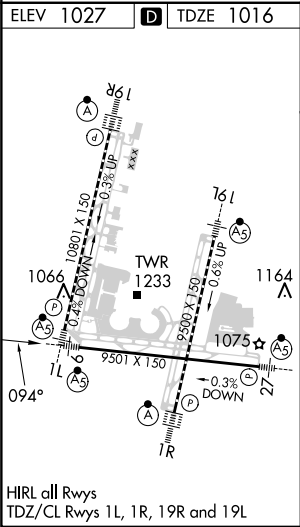




APP CRS	Rwy Idg	9501
094°	TDZE	1016
	Apt Elev	1027

RNAV (RNP) Z RWY 9

KANSAS CITY INTL (MCI)

RNP AR APCH - GPS.			MALSR 	MISSED APPROACH: Climb to 4000 direct DUSTN and on track 092° LYMES and hold.		
▼ For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.20 all Cats visibility to RVR 4500; increase RNP 0.30 all Cats visibility to RVR 6000.						
D-ATIS 128.375	KANSAS CITY APP CON 120.95 318.1	INTERNATIONAL TOWER 128.2 254.25	GND CON 121.8	CLNC DEL 135.7	CPDLC	

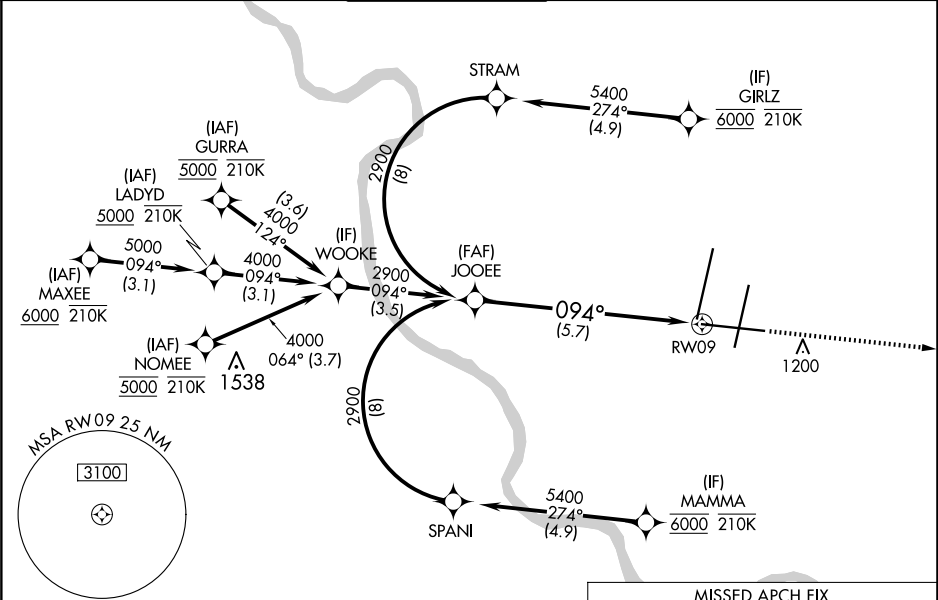

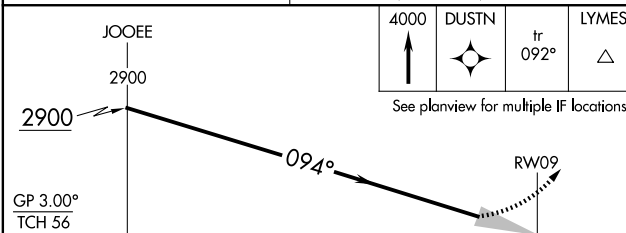MISSED APCH FIX 																
JOOEE 2900 2900 GP 3.00° TCH 56																
See planview for multiple IF locations.																
<table><tr><td>4000 ↑</td><td>DUSTN </td><td>tr 092°</td><td>LYMES </td></tr></table>		4000 ↑	DUSTN 	tr 092°	LYMES 											
4000 ↑	DUSTN 	tr 092°	LYMES 													
<table><tr><td>CATEGORY</td><td>A</td><td>B</td><td>C</td><td>D</td></tr><tr><td>RNP 0.20 DA</td><td colspan="4">1319/24 303 (300-½)</td></tr><tr><td>RNP 0.30 DA</td><td colspan="4">1418/40 402 (400-¾)</td></tr></table>		CATEGORY	A	B	C	D	RNP 0.20 DA	1319/24 303 (300-½)				RNP 0.30 DA	1418/40 402 (400-¾)			
CATEGORY	A	B	C	D												
RNP 0.20 DA	1319/24 303 (300-½)															
RNP 0.30 DA	1418/40 402 (400-¾)															
AUTHORIZATION REQUIRED																