

WAAS	APP CRS	Rwy Idg	5343
CH 97421	053°	TDZE	124
W05A		Apt Elev	125

RNAV (GPS) RWY 5


LUMBERTON RGNL (LBT)

RNP APCH - GPS.

When local altimeter setting not received, use Maxton altimeter setting: increase LPV DA to 383 feet; LNAV/VNAV DA to 594 feet and all visibility ¼ SM; increase all MDAs 60 feet and LNAV visibility Cat C and Circling Cat C ¼ SM. Baro-VNAV and VDP NA when using Maxton altimeter setting. Circling Rwy 13, 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH:
Climb to 2000 direct
WIVGA and hold.

ASOS 134.775	FAYETTEVILLE APP CON 133.0 290.25	UNICOM 122.8 (CTAF)
-----------------	--------------------------------------	------------------------

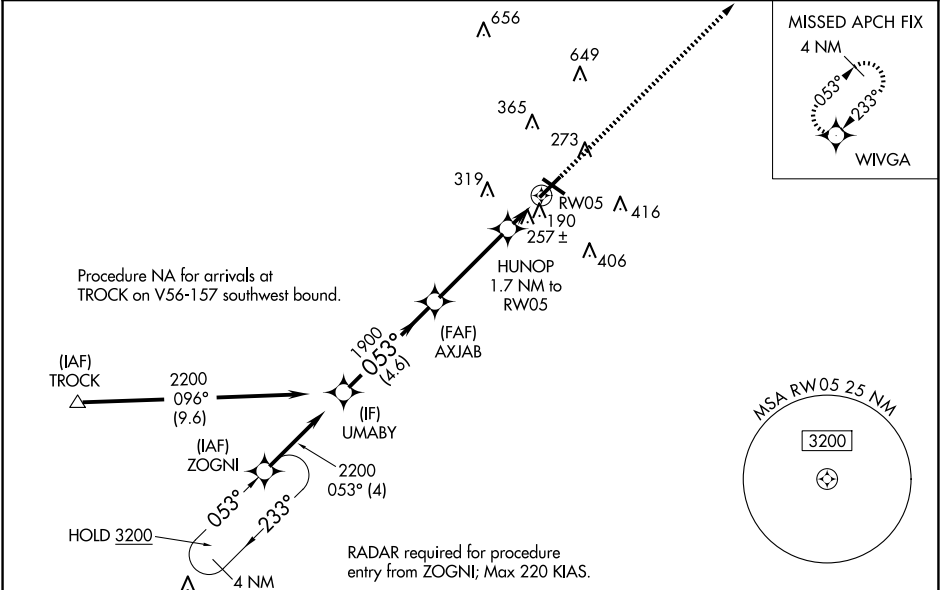

ELEV 125	TDZE 124
----------	----------

UMABY					2000 ↑	WIVGA ✧
<u>2200</u> Procedure Turn NA GP 3.00° TCH 60	AXJAB 1900 HUNOP 1.7 NM to RW05 * 1.1 NM to RW05 RW05					*LNAV only.
	053° 1900 720*					
	4.6 NM		3.7 NM		0.6	1.1
CATEGORY	A		B		C	D
LPV DA	327-¾ 203 (300-¾)					NA
LNAV/ VNAV DA	538-1⅛ 414 (500-1⅛)					NA
LNAV MDA	520-1 396 (400-1)			520-1⅛ 396 (400-1⅛)		NA
CIRCLING	660-1 535 (600-1)			720-1½ 595 (600-1½)		NA

