

LOC I-GGG <u>109.5</u>	APP CRS 131°	Rwy Idg 9200 TDZE 358 Apt Elev 366
----------------------------------	------------------------	---

ILS or LOC RWY 13
EAST TEXAS RGNL (GGG)


ADF or DME required for procedure entry.

▼ For inop ALS, increase S-ILS 13 Cat E visibility to RVR 4000, S-LOC 13 Cat C/D/E visibility to 1% SM. When local altimeter setting not received use Gilmer altimeter setting and increase DA 59 feet, all MDA 60 feet, increase LOC and Circling Cat C/D/E visibility ¼ SM. For inop ALS when using Gilmer altimeter setting increase S-ILS 13 all Cats to RVR 4500, S-LOC 13 Cat C/D/E visibility to 1% SM. *RVR 1800 authorized with the use of FD or AP or HUD to DA (NA when using Gilmer altimeter setting).




MISSED APPROACH:
Climb to 3000 via GGG
VORTAC R-126 to
ARGEN Int/GGG 14 DME
and hold.

ATIS 119.65	LONGVIEW APP CON★ 124.675 257.975	EASTEX TOWER★ 119.2(CTAF)0377.05	GND CON 121.6	UNICOM 122.95
----------------	--------------------------------------	-------------------------------------	------------------	------------------

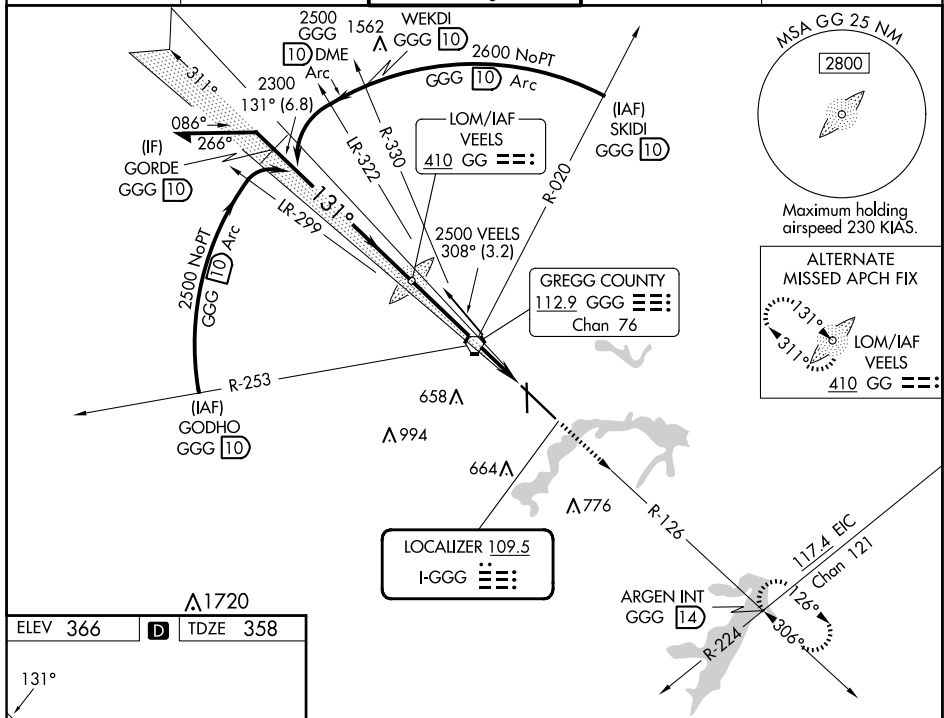


ELEV 366	D	TDZE 358
----------	----------	----------



HIRL Rwy 13-31 **L**
MIRL Rwy 18-36

FAF to MAP 5.6 NM					
Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52

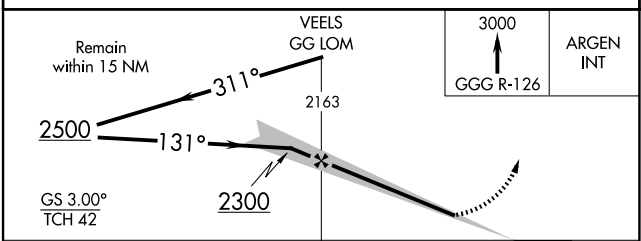

CATEGORY	A	B	C	D	E
S-ILS 13	*558/24 200 (200-½)				558/24 200 (200-½)
S-LOC 13	860/24	502 (500-½)	860/50	502 (500-1)	860/60 502 (500-1¼)
CIRCLING	860-1	494 (500-1)	980-1¾ 614 (700-1¾)	1080-2¼ 714 (800-2¼)	1080-2½ 714 (800-2½)