

APP CRS
313°

Rwy Ldg
TDZE
36

Apt Elev
36

RNAV (RNP) Z RWY 31
VALLEY INTL (HRL)

RNP AR APCH - GPS.


▼

For uncompensated Baro-VNAV systems, procedure NA below -1°C or above 54°C. For inop ALS, increase RNP 0.11 all Cats visibilities to ¾ SM and increase RNP 0.30 all Cats visibilities ⅞ SM. When local altimeter setting not received, procedure NA.

MALSR

MISSED APPROACH:
Climb to 2000 direct
CAKOB and hold.

ATIS 124.85	VALLEY APP CON 120.7 279.5	HARLINGEN TOWER ★ 119.3(CTAF) 317.6	GND CON 121.7	UNICOM 122.95
-----------------------	--------------------------------------	---	-------------------------	-------------------------

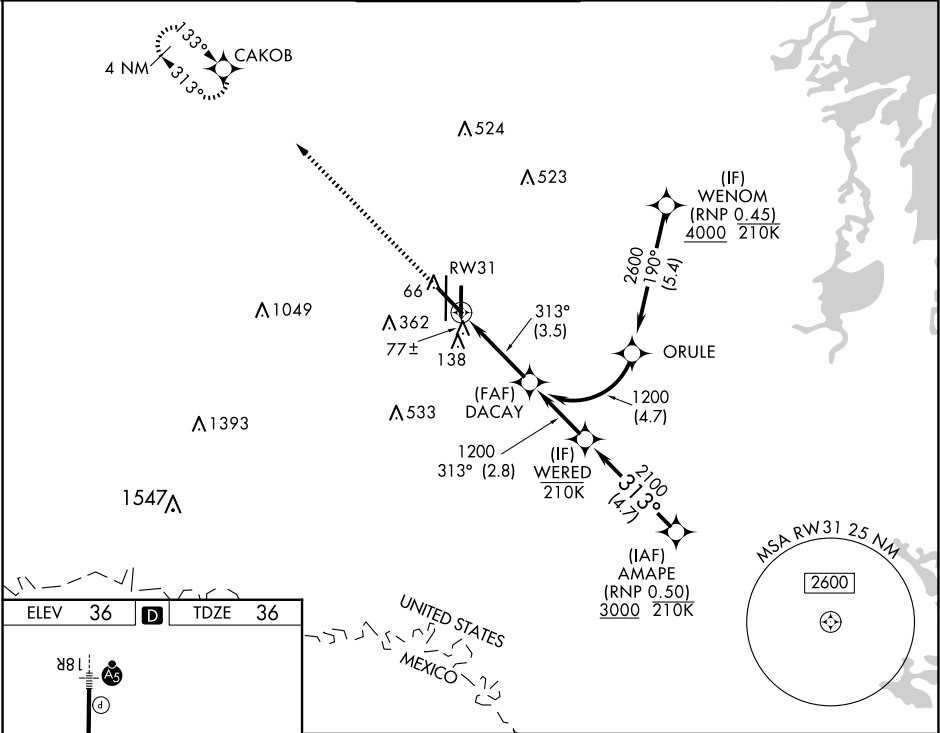

ELEV 36

D

TDZE 36

18L

13

TWR

9400 X 1.50

36L

313°

MIRL Rwy 18L-36R

REIL Rwys 13 and 18L

HIRL Rwys 13-31 and 18R-36L

2000

CAKOB

See Planview for multiple IF locations.

DACAY

1200

1200

GP 3.00°

TCH 55

3.5 NM

313°

RW31

CATEGORY	A	B	C	D
RNP 0.11 DA		286-½	250 (300-½)	
RNP 0.30 DA		339-½	303 (400-½)	

AUTHORIZATION REQUIRED