

LOC I- UIN 110.1	APP CRS 038°	Rwy Idg TDZE Apt Elev	7098 763 768
-----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 4

QUINCY RGNL-BALDWIN FLD (UIN)

ADF required.
RADAR required for procedure entry at RAYOK.

▼



NA

DME from UIN TACAN. DME use requires simultaneous reception of I-UIN and UIN TACAN. When local altimeter setting not received, use Pittsfield altimeter setting and increase S-ILS 04 DA to 1033 feet; increase all MDAs 80 feet and S-LOC 04 visibility Cat C/D ¾ SM. For inop ALS when local altimeter not received, increase S-ILS 4 all Cats visibility to ¾ SM and S-LOC 4 Cat C and D visibility to 1 ¾ SM.

MALSR

MISSED APPROACH: Climb to 1800 then climbing right turn to 2300 direct QUINCY LOM and hold.

ASOS 121.425	KANSAS CITY CENTER 126.225 317.775	UNICOM 123.0(CTAF) 1
------------------------	--	--------------------------------

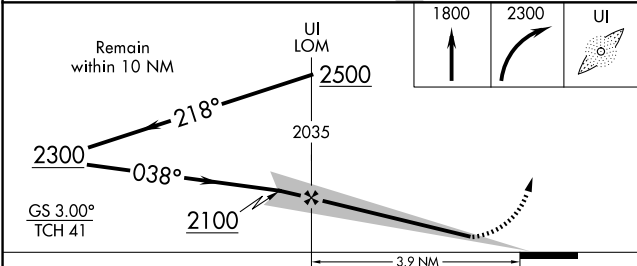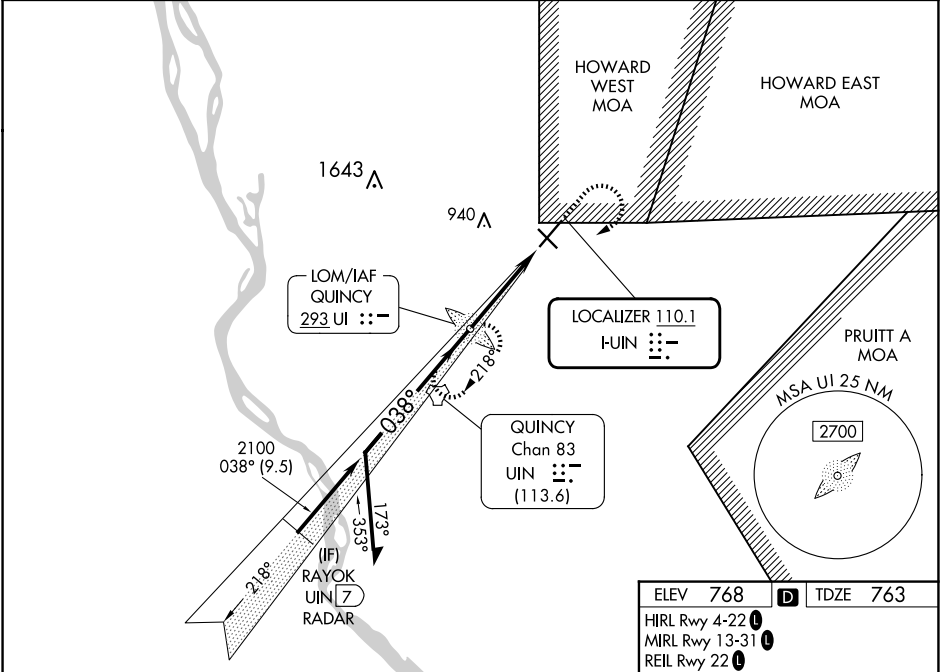

ELEV 768	TDZE 763
HIRL Rwy 4-22	
MIRL Rwy 13-31	
REIL Rwy 22	

1800	2300	UI

13	22

7098 X 150	5392 X 150

038°	820

FAF to MAP 3.9 NM					
Knots	60	90	120	150	180
Min:Sec	3:54	2:36	1:57	1:34	1:18

CATEGORY	A	B	C	D
S-ILS 4	963-1/2 200 (200-1/2)			
S-LOC 4	1160-1/2	397 (400-1/2)	1160-5/8	397 (400-5/8)
CIRCLING	1180-1 412 (500-1)	1220-1 452 (500-1)	1240-1 1/2 472 (500-1 1/2)	1320-2 552 (600-2)