

WAAS CH 53510 W04A	APP CRS 038°	Rwy Idg 7098 TDZE 763 Apt Elev 768
--	------------------------	---

RNAV (GPS) RWY 4
QUINCY RGNL-BALDWIN FLD (UIN)

RNP APCH - GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. Baro-VNAV and VDP NA when using PPG altimeter setting. When local altimeter setting not received, use Pitsfield altimeter setting and increase LPV DA to 1033 feet; increase LNAV/VNAV DA to 1104 feet and all visibilities ½ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¾ SM. For inop ALS when local altimeter setting not received, increase LPV all Cats visibility to ¾ SM; increase LNAV/VNAV all Cats visibility to 1 SM; increase LNAV Cat C and D visibility to 1¾ SM. For inop ALS increase LNAV/VNAV all Cats visibility to ¾ SM.

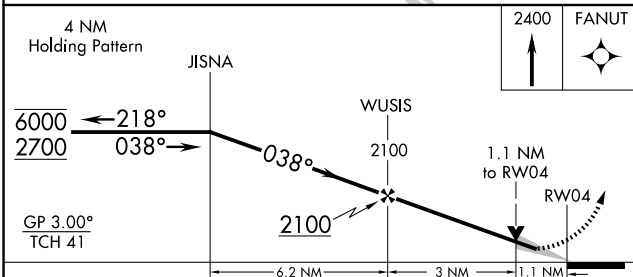
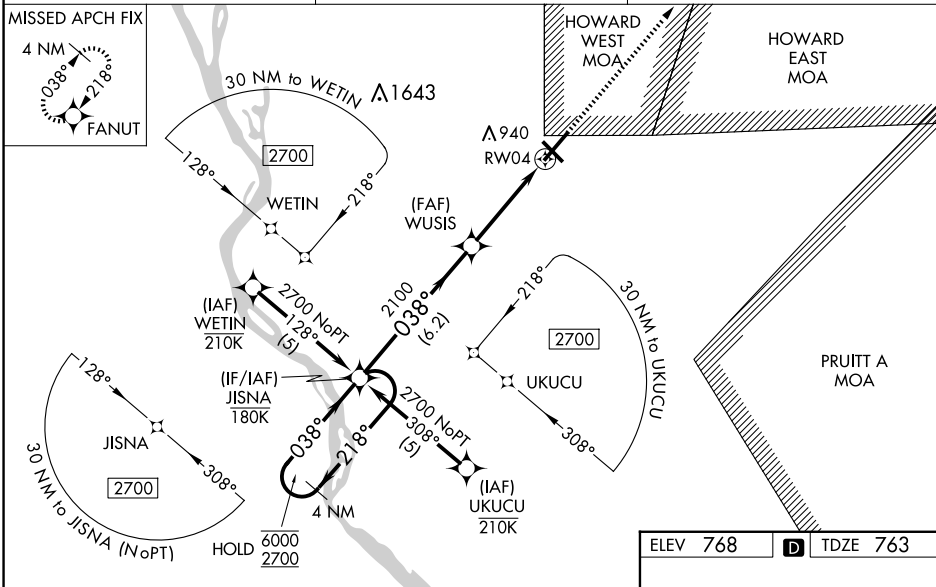
MALSR



MISSED APPROACH:
Climb to 2400 direct
FANUT and hold.

ASOS
121.425

KANSAS CITY CENTER
126.225 317.775

UNICOM
123.0 (CTAF) **L**

CATEGORY		A	B	C	D
LPV	DA	963-1/2		200 (200-1/2)	
LNAV/ VNAV	DA	1034-1/2		271 (300-1/2)	
LNAV	MDA	1160-1/2	397 (400-1/2)	1160-5/8	397 (400-5/8)
CIRCLING		1180-1 412 (500-1)	1220-1 452 (500-1)	1240-1 1/2 472 (500-1 1/2)	1320-2 552 (600-2)

