

WAAS CH 99515 W24A	APP CRS 242°	Rwy Idg 7699 TDZE 681 Apt Elev 695
--	------------------------	---

RNAV (GPS) RWY 24


GREEN BAY/AUSTIN STRAUBEL INTL (GRB)

RNP APCH-GPS.


T For uncompensated Baro-VNAV systems, LNAV/VNAV
ASR NA below -16° C or above 54°C.

MISSED APPROACH: Climb to 2500 direct KILBY and hold.

ATIS 124.1	GREEN BAY APP CON ★ 119.4 338.2	GREEN BAY TOWER ★ 118.7 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.75
----------------------	---	--	-------------------------	---------------------------

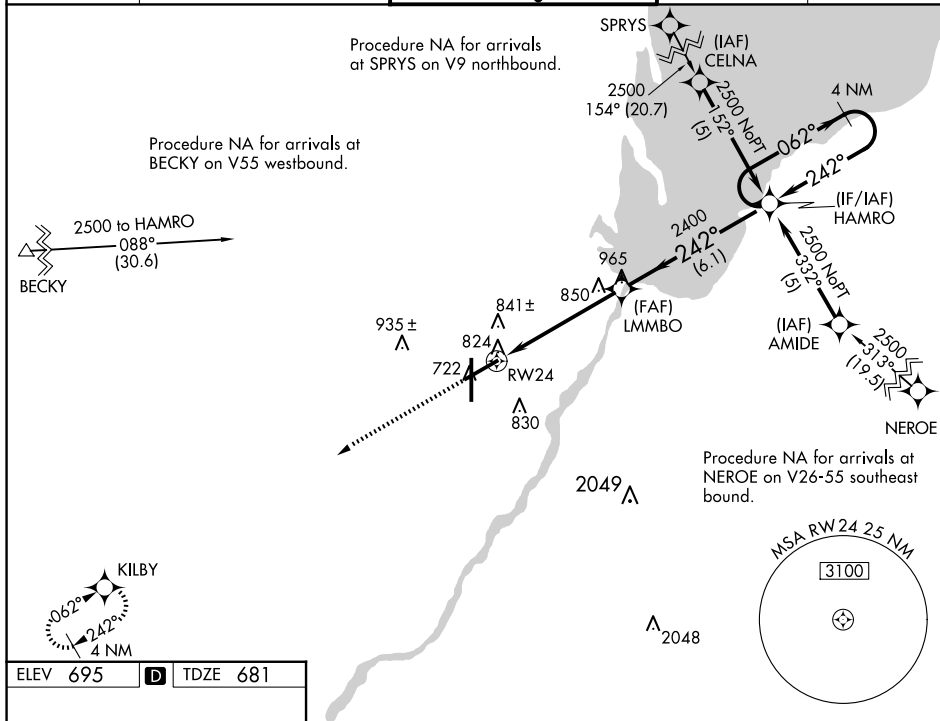

ELEV 695	D	TDZE 681
----------	----------	----------

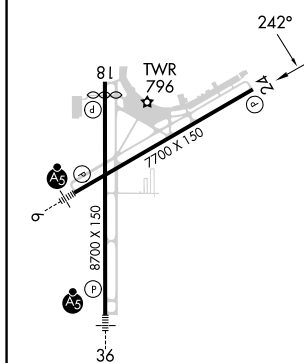REIL Rwy 18 **L**HIRL Rwy 6-24 and 18-36 **L**

GREEN BAY, WISCONSIN

Amdt 1B 12AUG21

Diagram illustrating the 2500 Holding Pattern. The pattern is defined by a series of parallel tracks. Key dimensions and features include:

- Pattern Dimensions:** The pattern is 4 NM wide. The inbound leg is 2.42 NM, and the outbound leg is 2.42 NM. The turn is 062 degrees.
- Waypoints:** The pattern is centered on the LMMBO and HAMRO waypoints.
- Altitude:** The holding pattern is at 2500 feet.
- Scale:** The diagram includes a scale bar with segments of 1.2 NM, 4 NM, and 6.1 NM.
- Other Labels:** The diagram also shows the 2500 Holding Pattern, the LMMBO and HAMRO waypoints, and the 2500 Holding Pattern.

GREEN BAY/AUSTIN STRAUBEL INTL (GRB)

RNAV (GPS) RWY 24