


LOC I-GPI	APP CRS	Rwy Idg	9007
111.5	020°	TDZE	2966
		Apt Elev	2977

ILS or LOC RWY 2

GLACIER PARK INTL (GPI)

DME required. RNAV 1-GPS or RADAR required for procedure entry.		MALSR	MISSED APPROACH: Climb to 4100 then climbing left turn to 12000 on heading 190° and FCA VOR/DME R-238 to KILLY/15.7 DME and hold, continue climb-in-hold to 12000.	
Inop table does not apply to S-LOC 2 Cats C/D.				
ATIS	SALT LAKE CENTER	GLACIER TOWER*	GND CON	UNICOM
132.625	127.075 244.875	124.55 (CTAF) 0	121.6	122.95

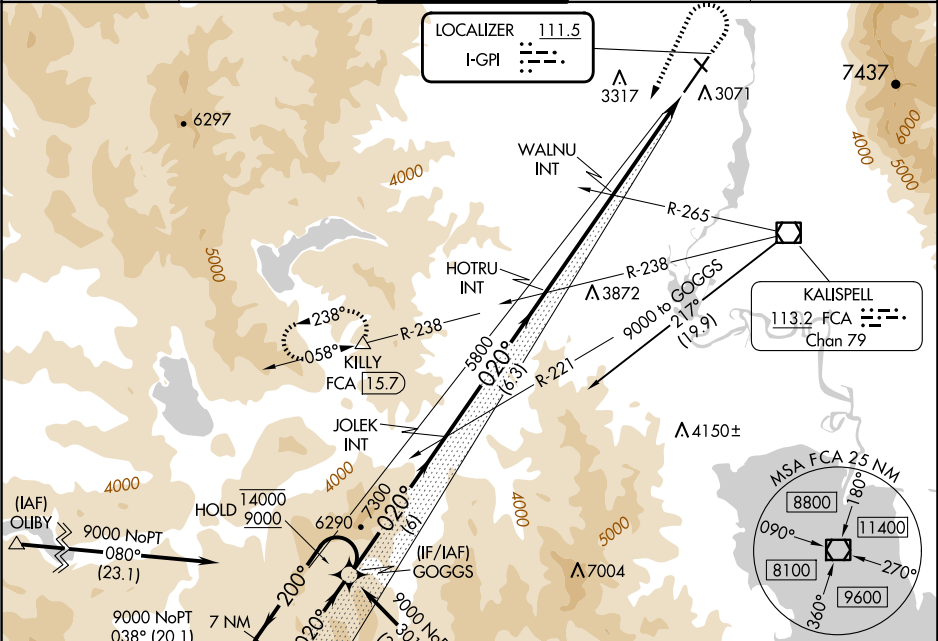

7 NM Holding Pattern		GOGGS		JOLEK INT		HOTRU INT		WALNU INT		KILLY	
14000 ← 200°		020° →		020°		5800		*4440		*LOC only	
9000		7300		5800		5800		5800		△	
GS 3.00°											
TCH 51											
6 NM		6.3 NM		4.3 NM		4.5 NM					
CATEGORY	A			B		C		D			
S-ILS 2				3166-1/2		200 (200-1/2)					
S-LOC 2	4440-3/4 1474 (1500-3/4)			4440-1 1474 (1500-1)		4440-3		1474 (1500-3)			
CIRCLING	4440-1 1/4 1463 (1500-1 1/4)			4440-1 1/2 1463 (1500-1 1/2)		4440-3		1463 (1500-3)			
WALNU FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)											
S-LOC 2	3520-1/2			554 (600-1/2)		3520-1 1/8		554 (600-1 1/8)			
CIRCLING	3520-1 543 (600-1)			3580-1 603 (700-1)		3680-2 703 (800-2)		3760-2 1/2 783 (800-2 1/2)			

