

|                                        |                        |                                                             |
|----------------------------------------|------------------------|-------------------------------------------------------------|
| WAAS<br>CH <b>82610</b><br><b>W24A</b> | APP CRS<br><b>239°</b> | Rwy Idg <b>7006</b><br>TDZE <b>99</b><br>Apt Elev <b>99</b> |
|----------------------------------------|------------------------|-------------------------------------------------------------|

RNAV (GPS) RWY 24

LONG ISLAND MAC ARTHUR (ISP)



⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

MALSR

MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct BJACK and hold.

|                        |                                          |                                                  |                         |                           |                         |
|------------------------|------------------------------------------|--------------------------------------------------|-------------------------|---------------------------|-------------------------|
| ATIS<br><b>120.725</b> | NEW YORK APP CON<br><b>120.05 343.75</b> | LONG ISLAND TOWER*<br><b>119.3 (CTAF) 0335.5</b> | GND CON<br><b>135.3</b> | CLNC DEL<br><b>121.85</b> | UNICOM<br><b>122.95</b> |
|------------------------|------------------------------------------|--------------------------------------------------|-------------------------|---------------------------|-------------------------|

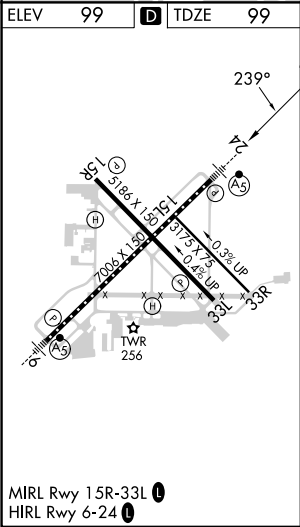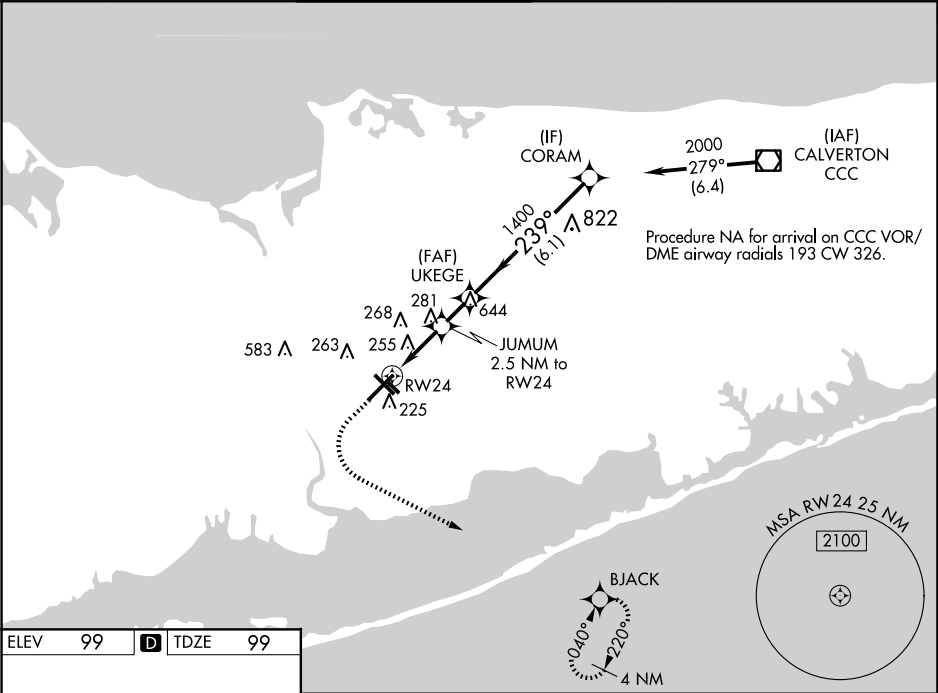

|              |                   |                      |                     |                     |
|--------------|-------------------|----------------------|---------------------|---------------------|
|              | 600               | 2000                 | BJACK               |                     |
|              |                   |                      |                     |                     |
|              | *LNAV only.       |                      |                     |                     |
|              |                   | JUMUM 2.5 NM to RW24 | UKEGE 1400          | CORAM 2000          |
|              |                   | *1.2 NM to RW24      |                     |                     |
|              |                   |                      | *940                |                     |
|              |                   |                      | 1400                |                     |
|              |                   |                      |                     | GP 3.00° TCH 52     |
|              | 1.2 NM            | 1.3 NM               | 1.4 NM              | 6.1 NM              |
| CATEGORY     | A                 | B                    | C                   | D                   |
| LPV DA       | 299/18            |                      | 200 (200-½)         |                     |
| LNAV/VNAV DA | 541/50            |                      | 442 (500-1)         |                     |
| LNAV MDA     | 520/24            | 421 (500-½)          |                     | 520/40 421 (500-¾)  |
| CIRCLING     | 600-1 501 (600-1) | 660-1 561 (600-1)    | 660-1½ 561 (600-1½) | 960-2¾ 861 (900-2¾) |