

APP CRS	Rwy Ldg	10200
258°	TDZE	926
	Apt Elev	944

RNAV (RNP) Z RWY 26L
ONTARIO INTL (ONT)

RNP AR APCH - GPS.

T For uncompensated Baro-VNAV systems, procedure NA below 1°C or above 54°C. For inop ALS, increase RNP 0.10 visibility all Cats to RVR 4500, RNP 0.17 visibility all Cats to RVR 5000, RNP 0.30 visibility all Cats to RVR 6000.

ALSF-2



MISSED APPROACH: Climb to 3400 on track 258° to AXOYO and track 174° to LAKVE and track 122° to MRIAM and track 079° to ADRYN and hold.

D-ATIS
124.25


SOCAL APP CON
127.0 318.2

ONTARIO TOWER
120.6 360.775

GND CON
121.9 257.8


CLNC DEL
132.9

CPDLC

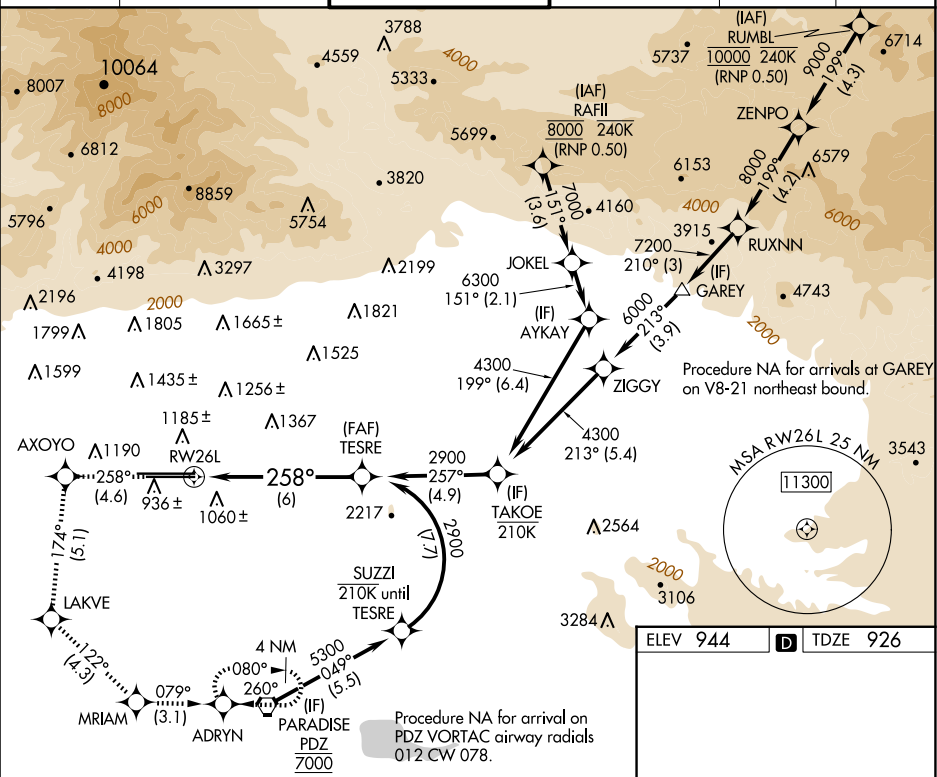

3400 ↑ tr 258°	AXOYO ✱ tr 174°	LAKVE ✱ tr 122°	MRIAM ✱ tr 079°	ADRYN ✱	TESRE 2900
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74). RW26L See planview for multiple IF locations. 258° 2900 GP 3.00° TCH 58 6 NM					
CATEGORY	A	B	C	D	
RNP 0.10 DA		1203/24	277 (300-½)		
RNP 0.17 DA		1245/24	319 (400-½)		
RNP 0.30 DA		1322/35	396 (400-¾)		
AUTHORIZATION REQUIRED					

ELEV 944	D	TDZE 926
----------	----------	----------

[illegible]

TDZ/CL Rwys 8L, 26R and 26L
HIRL Rwys 8L-26R and 8R-26L

ONTARIO, CALIFORNIA

Amdt 3 24MAR22

34°03'N-117°36'W

ONTARIO INTL (ONT)

RNAV (RNP) Z RWY 26L

SW-3, 12 JUN 2025 to 10 JUL 2025