

WAAS CH 40005 W32A	APP CRS 320°	Rwy Idg 3576 TDZE 672 Apt Elev 672
--	------------------------	---

RNAV (GPS) RWY 32
KEOKUK MUNI (EOK)


RNP APCH - GPS.

- T** Procedure NA at night. Rwy 32 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA when using Burlington altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Burlington altimeter setting: increase LPV DA to 978 feet; increase LNAV/VNAV DA to 1220 feet and all visibilities ¼ SM. Increase all MDAs 60 feet visibility Cat C visibility ¼ SM.


MISSED APPROACH: Climb to 2400
direct HAVLU and hold.

AWOS-3 118.375	KANSAS CITY CENTER 126.225 317.775	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

MISSED APCH FIX

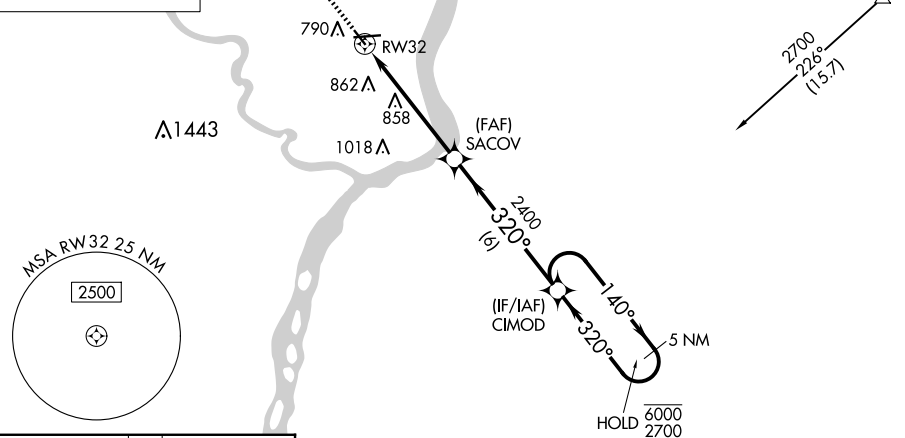

ELEV 672		TDZE 672
----------	--	----------



REIL Rwy 8, 14, and 32 **L**
MIRL Rwy 8-26 and 14-32 **L**