

WAAS CH 82615 W30A	APP CRS 305°	Rwy Idg TDZE Apt Elev	5301 1142 1156
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 30

FORT DODGE RGNL (FOD)


RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.
A Helicopter visibility reduction below 3/4 SM NA. VDP and Baro-VNAV NA when using Webster City altimeter setting. When local altimeter setting not received, use Webster City altimeter setting: increase LPV DA to 1466 feet and all Cats visibility 1/4 SM; increase LNAV/VNAV DA to 1516 feet; increase all MDA 60 feet and LNAV Cats C/D and Circling Cat C visibility 1/4 SM.


MISSED APPROACH: Climb to 3400 direct CUVPO and hold.

AWOS-3PT
118.775

MINNEAPOLIS CENTER
134.0 288.3

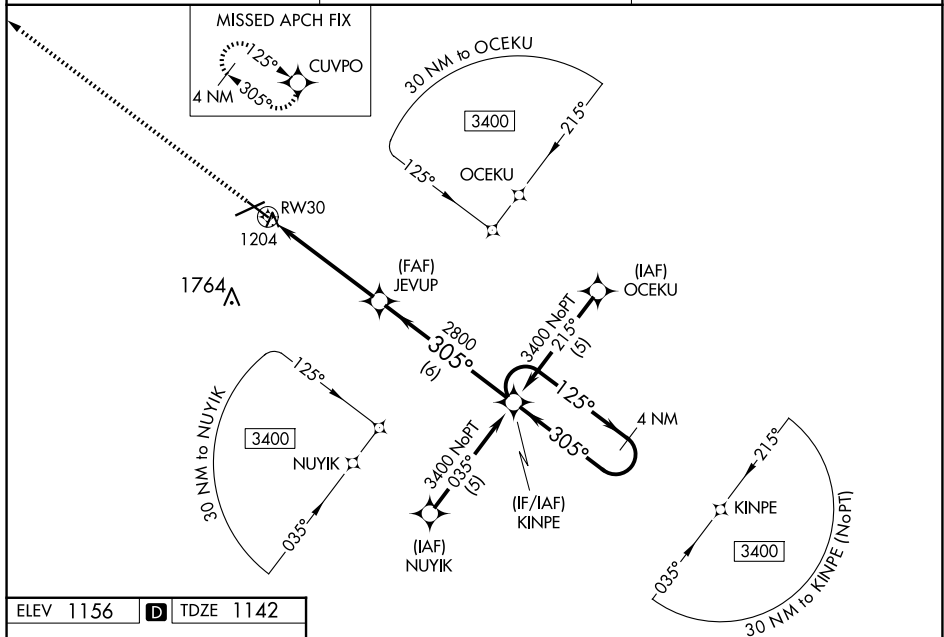UNICOM
123.0 (CTAF) **L**

ELEV 1156	D	TDZE 1142
-----------	----------	-----------

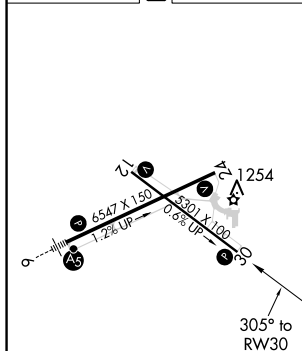

MIRL Rwy 12-30 **L**
HIRL Rwy 6-24 **L**
REIL Rwy 12, 24 and 30 **L**

