

WAAS CH 49119 W19B	APP CRS 196°	Rwy Ldg TDZE Apt Elev	7302 1320 1333
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 19L
WICHITA DWIGHT D EISENHOWER NTL (ICT)

RNP APCH.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Simultaneous approach authorized with ILS or LOC RWY 19R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR



MISSED APPROACH:
Climb to 3600 direct
YELOO and hold.

ATIS 125.15	WICHITA APP CON 126.7 353.5	WICHITA TOWER 118.2 257.8	GND CON 121.9 348.6	CLNC DEL 125.7
----------------	--------------------------------	------------------------------	------------------------	-------------------

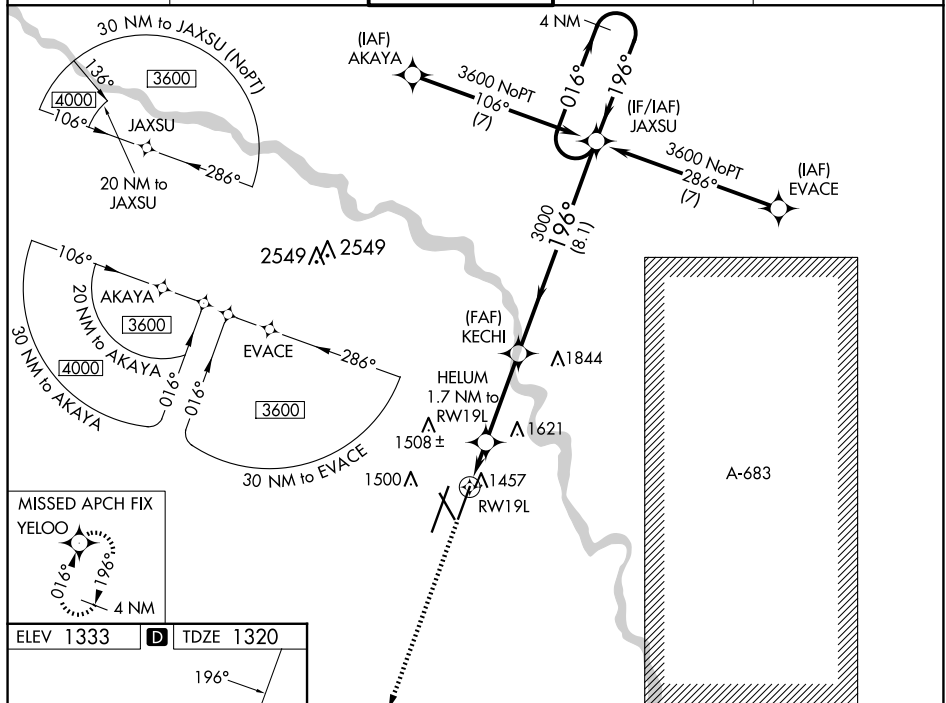

ELEV 1333	D	TDZE 1320
-----------	----------	-----------

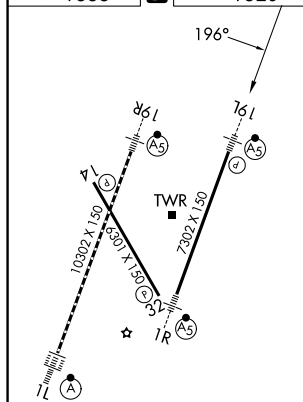


Diagram illustrating the HELM 17 NM to RW19L instrument approach. The approach is for RW19L. Key waypoints and altitudes are shown: YELOO (3600), HELM (17 NM to RW19L), KECHI (3000), and JAXSU (3600). The approach includes a 4 NM Holding Pattern at 3600. The approach is for HELM 17 NM to RW19L. The diagram includes a scale bar showing 1.1 NM, 0.6, 3.4 NM, and 8.1 NM. The approach is for HELM 17 NM to RW19L. The diagram includes a scale bar showing 1.1 NM, 0.6, 3.4 NM, and 8.1 NM. The approach is for HELM 17 NM to RW19L. The diagram includes a scale bar showing 1.1 NM, 0.6, 3.4 NM, and 8.1 NM.

HIRL all Rwy's
REIL Rwy's 14 and 32
TDZ/CL Rwy 1L

WICHITA, KANSAS
Amdt 2A 24MAY18

WICHITA DWIGHT D EISENHOWER NTL (ICT)
RNAV (GPS) Y RWY 19L

37°39'N-97°26'W

NC-2, 12 JUN 2025 to 10 JUL 2025