

WAAS CH 45509 W19A	APP CRS 184°	Rwy Idg 5992 TDZE 140 Apt Elev 141
--	------------------------	---

RNAV (GPS) RWY 19

WAYCROSS-WARE COUNTY (AYS)

▼
▲

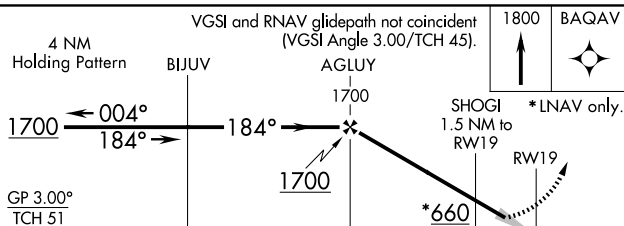
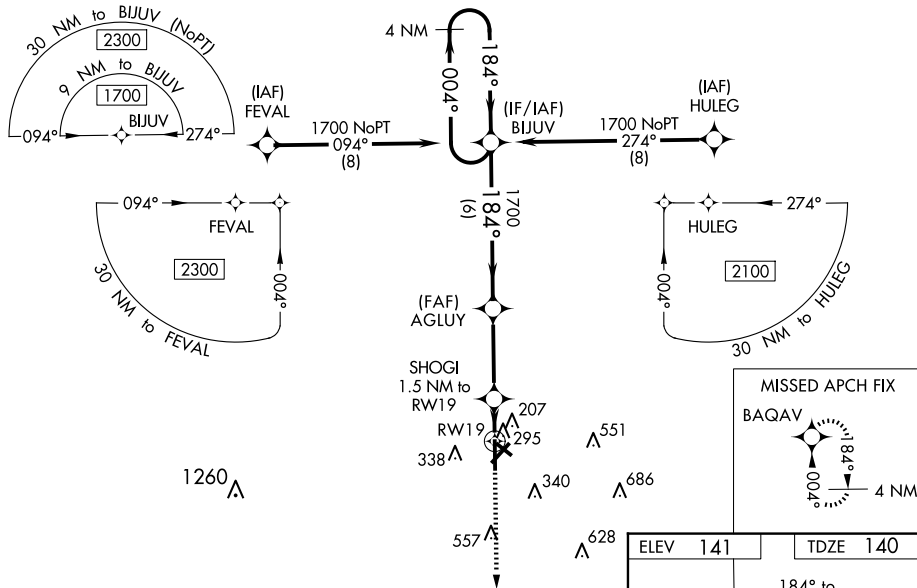
DME/DME RNP-0.3 NA. Baro-VNAV NA when using Alma altimeter setting. When local altimeter setting not received, use Alma altimeter setting: increase LPV DA to 390 feet and LNAV/VNAV DA to 600 feet and all MDA 60 feet; increase LNAV/VNAV visibility all Cats and LNAV Cat C/D visibility ¼ mile; increase Circling Cat C/D visibility ¼ mile. For inop MALS, increase LNAV Cat C/D visibility to 1½ mile. For inop MALS when using Alma altimeter setting increase LNAV/VNAV visibility all Cats to 1½ mile, and LNAV Cat C/D visibility to 1½ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Night landing Rwy 5, 31 NA.

MALSR

MISSED APPROACH:
Climb to 1800 direct
BAQAV and hold.

AWOS-3
118.575

JACKSONVILLE CENTER
127.575 269.025

UNICOM
122.8 (CTAF) **L**

CATEGORY		A		B		C		D	
LPV	DA	340-1/2				200 (200-1/2)			
LNAV/ VNAV	DA	550-7/8				410 (500-7/8)			
LNAV	MDA	560-1/2 420 (500-1/2)				560-3/4 420 (500-3/4)			
 CIRCLING		660-1 519 (600-1)		720-1 579 (600-1)		860-2 719 (800-2)		860-2 1/4 719 (800-2 1/4)	

