



WAAS CH 58329 W20B	APP CRS 203°	Rwy Idg 11050 TDZE 439 Apt Elev 439
--	------------------------	--

RNAV (GPS) Y RWY 20R
FAIRBANKS INTL (FAI) (PAFA)

RNP APCH - GPS. ✚ -29°C For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. # RVR 1800 authorized with use of FD or AP or HUD to DA.	MAISLR ✚ MISSED APPROACH: Climb to 3000 direct JOTUG and hold.
--	--

ATIS 124.4	FAIRBANKS APP CON 125.35 363.2	FAIRBANKS TOWER 118.3 257.8	GND CON 121.9	CLNC DEL 127.6
----------------------	--	---------------------------------------	-------------------------	--------------------------

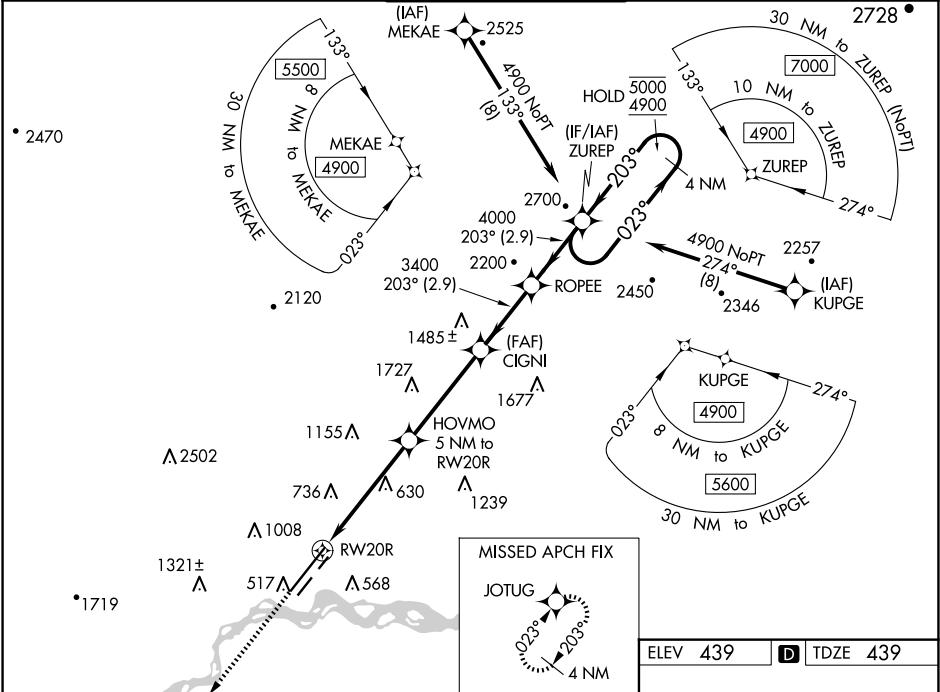

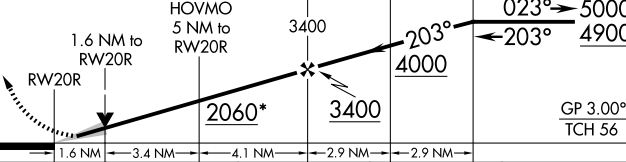3000 ↑ JOTUG	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).				ZUREP	4 NM Holding Pattern
		HOVMO 5 NM to RW20R	CIGNI 3400	ROPEE		
1.6 NM		3.4 NM	4.1 NM	2.9 NM	2.9 NM	
RW20R		2060*	3400	4000	5000	4900
GP 3.00° TCH 56						
CATEGORY	A		B	C	D	
LPV DA#	639/24		200 (200-½)			
LNAV/ VNAV DA	1148-2		709 (800-2)			
LNAV MDA	1020/24 581 (600-½)			1020-1¼	581 (600-1¼)	
C CIRCLING	1020-1 581 (600-1)			1020-1¾ 581 (600-1¾)	1020-2 581 (600-2)	

