




GND CON
127.25 335.5
SILVERBOW TOWER ★
124.75 257.95
NELLIS CONTROL
119.35 254.4

Rwy	Knots	60	120	180	240	300	360
14 ⓐ	V/V(fpm)	205	410	615	820	1025	1230
32 ⓑ	V/V(fpm)	260	520	780	1040	1300	1560

MINIMUM CLMB RATE

- ⓐ to 7200
- ⓑ to 9100

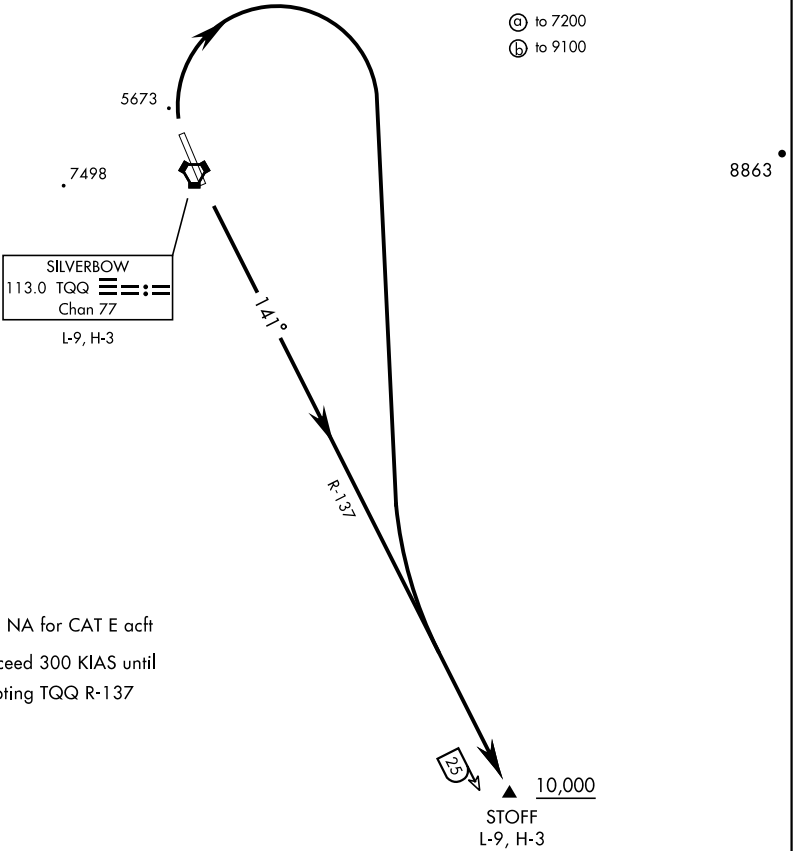

Procedure NA for CAT E acft
Do not exceed 300 KIAS until
intercepting TQQ R-137

▼

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 14: Climbing heading 141° to intercept TQQ VORTAC R-137 to STOFF, cross STOFF at or above 10,000.

TAKE-OFF RWY 32: Climbing right turn to intercept TQQ VORTAC R-137 to STOFF, cross STOFF at or above 10,000.



SW-4, 12 JUN 2025 to 10 JUL 2025

SW-4, 12 JUN 2025 to 10 JUL 2025