

WAAS CH 77501 W21A	APP CRS 207°	Rwy Idg 5200 TDZE 1540 Apt Elev 1540
--	------------------------	---

RNAV (GPS) RWY 21
VENANGO RGNL (FKL)

VENANGO RGNL (FKL)

RNP APCH.

A For uncompensated bare VNAV systems, LNAV/VNAV NA below 10°C (50°F) or above 45°C (114°F). Circling Rwy 12 NA at night. For inop ALS, increase LPV all Cats visibility to 7/8 SM and LNAV Cats C/D visibility to 1 SM.

MALSR



MISSED APPROACH:
Climb to 3400 direct
BUVCA and hold.

AWOS-3PT

118.175

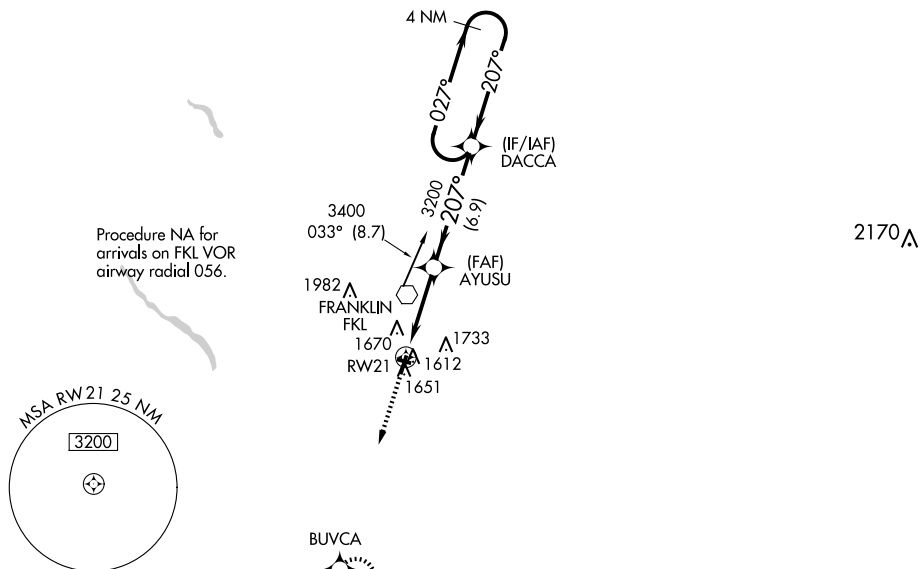
YOUNGSTOWN APP CON ★

126,25 322,3

CLNC DEL

126.25

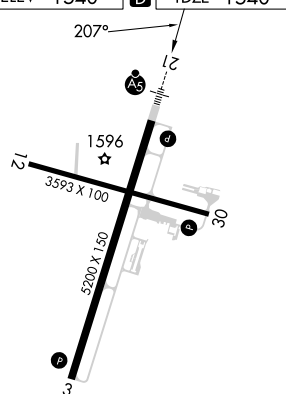
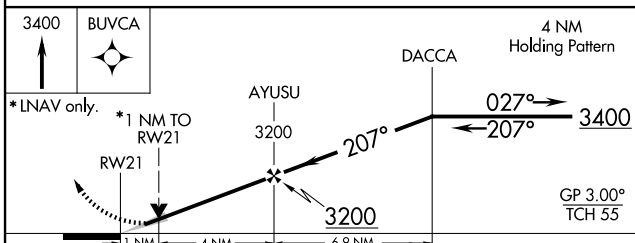
UNICOM

122.7 (CTAF) **L**

ELEV 1540		TDZE 1540
-----------	---	-----------

D

TR

MIRL Rwy 12-30 **L**HIRL Rwy 3-21 **L**

CATEGORY		A		B		C		D	
LPV	DA			1803- $\frac{1}{2}$ 263 (300- $\frac{1}{2}$)					
INAV/ VNAV	DA			1901- $\frac{3}{4}$ 361 (400- $\frac{3}{4}$)					
INAV	MDA	1900- $\frac{1}{2}$ 360 (400- $\frac{1}{2}$)				1900- $\frac{5}{8}$ 360 (400- $\frac{5}{8}$)			
CIRCLING		1960-1 $\frac{1}{4}$ 420 (500-1 $\frac{1}{4}$)		2000-1 $\frac{1}{4}$ 460 (500-1 $\frac{1}{4}$)		2040-1 $\frac{1}{2}$ 500 (500-1 $\frac{1}{2}$)		2100-2 560 (600-2)	