

VOR/DME MIE	APP CRS	Rwy Ldg
114.4	143°	6500
Chan 91		TDZE 933
		Apt Elev 937

VOR RWY 14

DELAWARE COUNTY RGNL (MIE)


▼

▲

When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase all MDAs 140 feet; increase S-14 Cat C visibility ½ SM, Cat D ¼ SM; increase Circling Cat C/D visibility ½ SM. BOHUW fix minimums: increase S-14 Cat C visibility ½ SM, Cat D ¼ SM and Circling Cat C/D visibility ½ SM. VDP NA with Fort Wayne altimeter setting.

MISSED APPROACH: Climb to 2600 then left turn direct MIE VOR/DME and hold.

ATIS	INDIANAPOLIS APP CON	MUNCIE TOWER ★	GND CON	UNICOM
133.25	120.65 317.8	120.1 (CTAF) 0	121.9	122.95

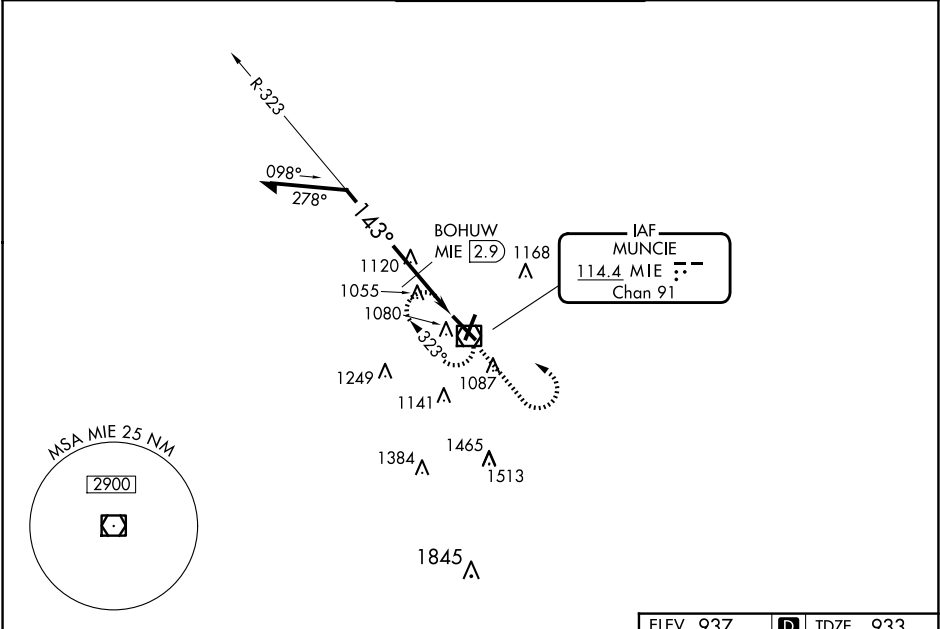

2600

MIE

↑

↶

☐

*1620 when using Fort Wayne Intl altimeter setting.

Remain within 10 NM

BOHUW MIE 2.9

MIE 2.1

*1480

0.8 1.3 0.8

CATEGORY	A	B	C	D
S-14	1480-1 547 (600-1)		1480-1½ 547 (600-1½)	1480-1¾ 547 (600-1¾)
CIRCLING	1480-1 543 (600-1)		1480-1½ 543 (600-1½)	1560-2 623 (700-2)
BOHUW FIX MINIMUMS				
S-14	1380-1 447 (500-1)		1380-1¼ 447 (500-1¼)	1380-1½ 447 (500-1½)
CIRCLING	1460-1 523 (600-1)		1480-1½ 543 (600-1½)	1560-2 623 (700-2)

ELEV 937

D

TDZE 933

143°

12

5198 X 100

6500 X 130

TWR ★

15

3

HIRL Rwy 14-32 0

MIRL Rwy 3-21 0

REIL Rwys 3, 14 and 21 0