

APP CRS	Rwy Ldg	8200
047°	TDZE	32
	Apt Elev	32

RNAV (GPS) RWY 5

PAGO PAGO INTL (PPG) (NSTU)

RNP APCH.

▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 22°C or above 54°C. When local altimeter setting not received, procedure NA. Circling NA northwest of Rwy 5-23. Rwy 5 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LNAV Cats A/B. For inop ALS, increase LNAV/VNAV all Cats visibility to 1¾ SM and LNAV Cats C/D visibility to 2 SM.


MALSRL

AS

⏏

MISSED APPROACH:
(Maintain 185 K max until 760) Climb to 760 then climbing right turn to 4000 direct DRAWN and hold.

FALEOLO APP CON 118.1 6.553 (HF)	CTAF 122.9	118.30
-------------------------------------	---------------	--------

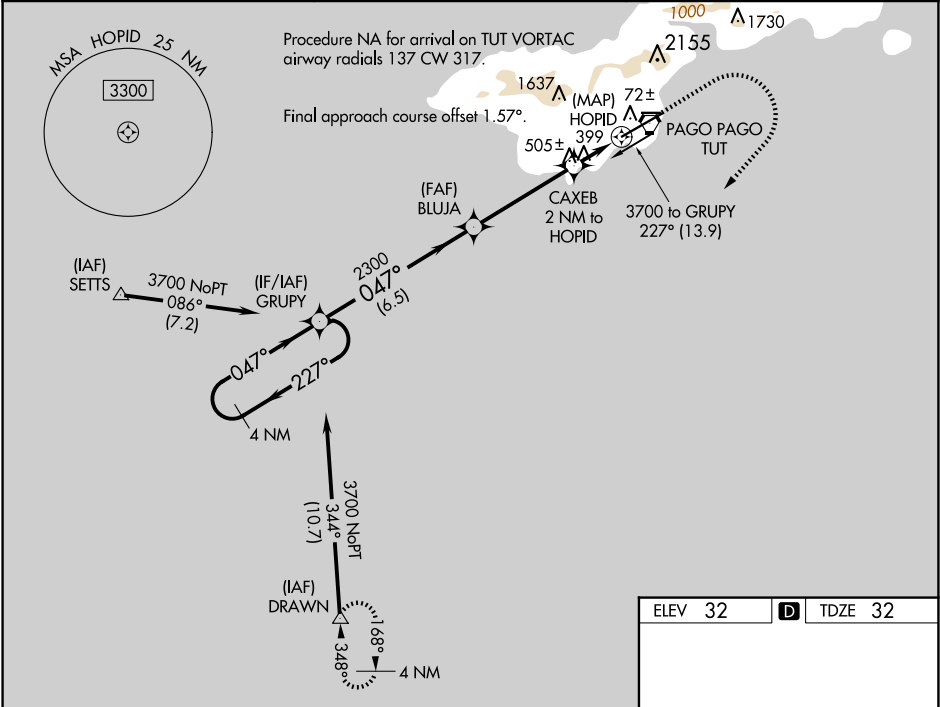

4 NM Holding Pattern

GROUPY

3700 ← 227° / 047° →

GP 3.25° TCH 51

VGSI and RNAV glidepath not coincident (VGSI Angle 3.25/TCH 57).

760 4000 DRAWN

BLUJA 2300

CAXEB 2 NM to HOPID

HOPID

*840

*LNAV only

6.5 NM 4.2 NM 2 NM 0.2

CATEGORY A B C D

LNAV/VNAV DA 551-1 519 (600-1)

LNAV MDA 760-1 728 (800-1) 760-1½ 728 (800-1½)

CIRCLING 760-1 728 (800-1) 820-2¼ 828 (900-2¾)

3801 X 100 10001 X 150

0.4% DOWN

047°