


WAAS CH 65600 W18A	APP CRS 184°	Rwy Idg TDZE 83 Apt Elev 83	7000
--	------------------------	---	-------------

RNAV (GPS) RWY 18

TALLAHASSEE INTL (TLH)

RNP APCH.		MISSED APPROACH: Climb to 3000 direct HEMUX and hold.			
▼ Rwy 18 helicopter visibility reduction below ¾ SM NA. ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV ASR NA below -5°C or above 54°C.					
ATIS	TALLAHASSEE APP CON ★	TALLAHASSEE TOWER ★	GND CON	CLNC DEL	UNICOM
119.45 239.25	135.8 317.4	118.7 (CTAF) 257.8	121.9 348.6	126.65 275.8	123.075

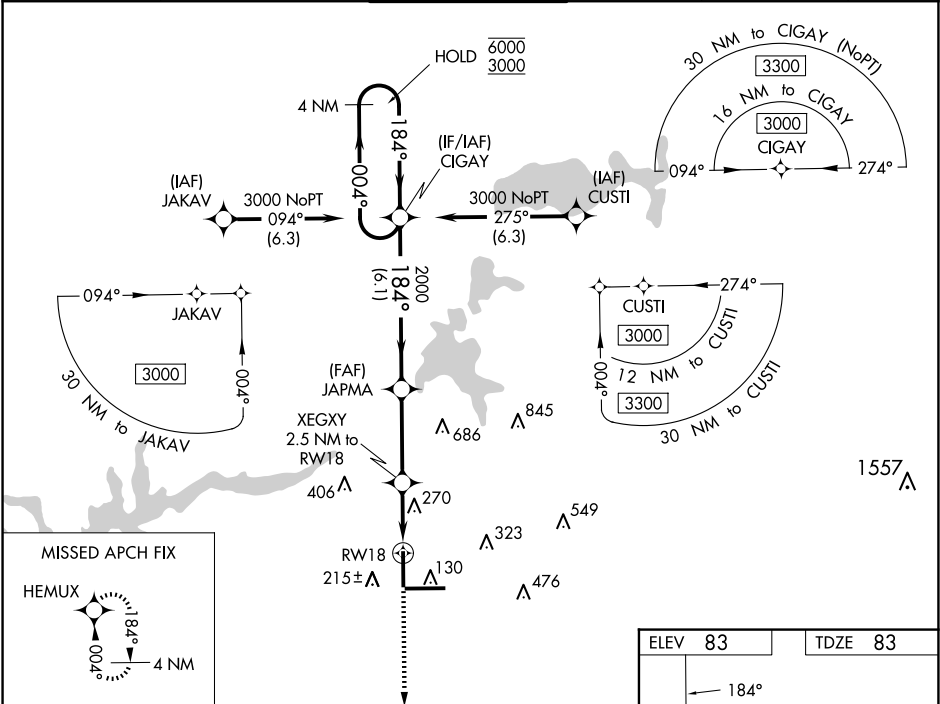

4 NM Holding Pattern		CIGAY		JAPMA		XEGXY 2.5 NM to RW18		RW18	
6000 ← 004°		3000 → 184°		2000		2000		*920	
GP 3.00°		TCH 55		6.1 NM		3.4 NM		1.3 NM	
CATEGORY		A		B		C		D	
LPV DA		333-¾		250 (300-¾)					
LNAV/VNAV DA		537-1½		454 (500-1½)					
LNAV MDA		520-1		437 (500-1)		520-1¼		437 (500-1¼)	
CIRCLING		580-1 497 (500-1)		600-1 517 (600-1)		640-1½ 557 (600-1½)		800-2¼ 717 (800-2¼)	

