


WAAS CH 61041 W23A	APP CRS 229°	Rwy Idg 5200 TDZE 15 Apt Elev 15
--	------------------------	---

RNAV (GPS) RWY 23

LAKE CHARLES RGNL (LCH)

RNP APCH - GPS.			MISSED APPROACH: Climb to 1700 direct WINUP and hold.		
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. Rwy 23 helicopter visibility reduction below ¾ SM NA.					
ATIS 118.75	LAKE CHARLES APP CON ★ 119.35 353.75	LAKE CHARLES TOWER ★ 120.7 (CTAF) 0 257.8	GND CON 121.8	CLNC DEL 126.25	UNICOM 122.95

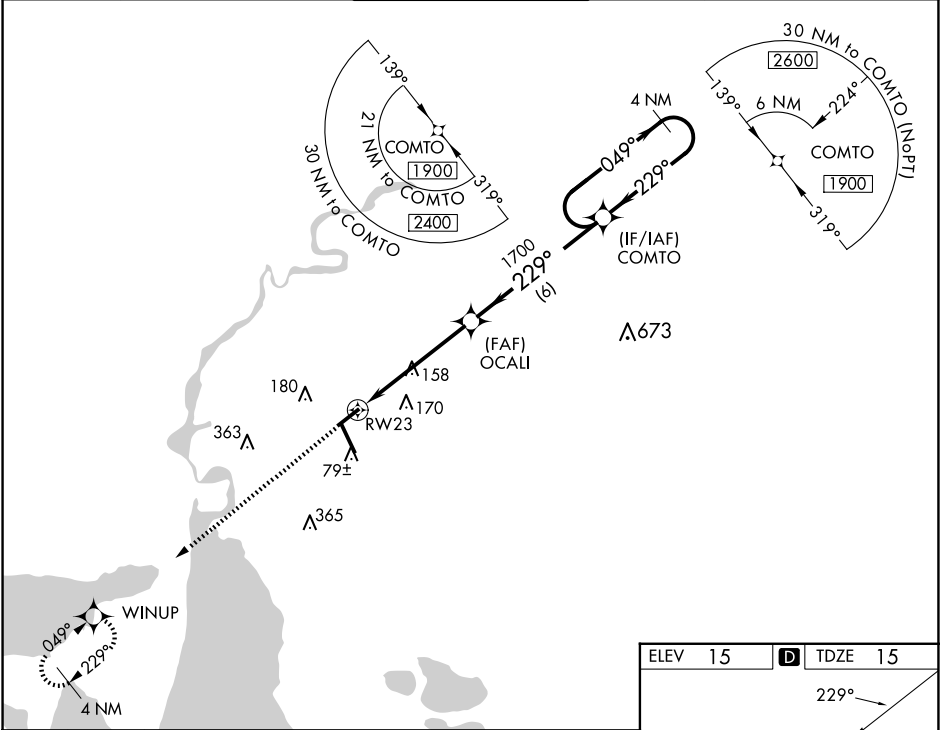

1700

↑

WINUP

✦

OCALI

1700

COMTO

4 NM Holding Pattern

049°

229°

1900

GP 3.00°

TCH 47

1.1 NM to RW23

RW23

1.1

4 NM

6 NM

229°

1700

CATEGORY	A	B	C	D
LPV DA	265-¾		250 (300-¾)	
LNAV/VNAV DA	301-⅞		286 (300-⅞)	
LNAV MDA	420-1 405 (500-1)		420-1½ 405 (500-1½)	
CIRCLING	440-1	480-1	580-1½	680-2
	425 (500-1)	465 (500-1)	565 (600-1½)	665 (700-2)

