

VOR TBN	APP CRS	Rwy Idg	5535
110.0	138°	TDZE	1158
		Apt Elev	1160

VOR RWY 15

WAYNESVILLE-ST ROBERT RGNL FORNEY FLD (TBN)


Procedure NA when R-4501B or R-4501H in use. Inop table does not apply to S-15 Cat A and B or to ZUTMA fix minimums. Circling NA west of Rwy 15-33. When local altimeter setting not received, use Rolla Nil altimeter setting and increase all MDAs 80 feet and increase S-15 visibility Cats C/D ¼ SM and Circling Cat C visibility ½ SM. Inop table does not apply to Cats A/B when using Rolla Nil altimeter setting. For inop ALS when using Rolla Nil altimeter setting increase S-15 Cats C/D visibility to 1¾ SM. For inop ALS when using Rolla Nil altimeter setting increase S-15 ZUTMA fix minimums Cats C/D visibility to 1¾ SM. #DME from I-TBN LOC/DME.

MALSR



MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 on TBN VOR R-323 to REBBS INT/I-TBN LOC/DME 11 DME and hold.

D-ATIS	KANSAS CITY CENTER	FORNEY TOWER ★	GND CON
118.7 229.4	128.35 284.675	125.4 (CTAF) 268.7	123.75 256.8

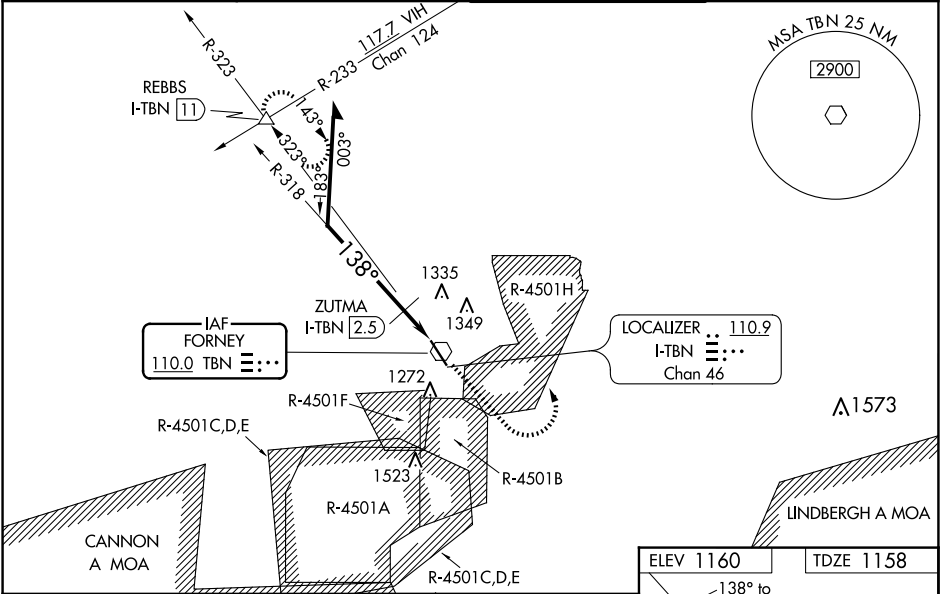

Remain within 10 NM		TBN VOR	2000	3000	REBBS
ZUTMA I-TBN [2.5]		I-TBN [1.9]	* 1780 when using Rolla Nil altimeter setting.		
2800		138°	TCH 50		
*1700		3.00°	0.6 NM 1 NM		
CATEGORY	A	B	C	D	
S-15	1700-1	542 (600-1)	1700-1½	542 (600-1½)	
CIRCLING	1700-1	540 (600-1)	1700-1½	1720-2	
			540 (600-1½)	560 (600-2)	
ZUTMA FIX MINIMUMS #					
S-15	1520-1	362 (400-1)			
CIRCLING	1580-1	1660-1	1660-1½	1720-2	
	420 (500-1)	500 (500-1)	500 (500-1½)	560 (600-2)	

ELEV 1160 TDZE 1158

138° to VOR

REIL Rwy 15-33

REIL Rwy 15 and 33

TWR 1250

1271