
MCRAY TWO DEPARTURE (RNAV)

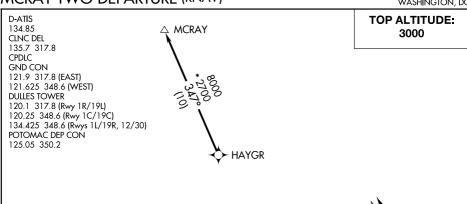

NOTE: RNAV 1.

NOTE: DME/DME/IRU or GPS required.

NOTE: RADAR required. NOTE: Turbojets only.

TAKEOFF MINIMUMS:

Rwys 1L/C/R, 19L/C/R, 30: Standard with minimum climb of 500' per NM to 820.

NOTE: Chart not to scale.

820

820

JE-3, 12 JUN 2025 to 10 JUL 2025

V

DEPARTURE ROUTE DESCRIPTION

3000

TAKEOFF RUNWAY 1L/C/R: Climb heading 011° to 820, then on heading 340° or as assigned by ATC, expect RADAR vectors to HAYGR, thence

TAKEOFF RUNWAYS 19L/C/R: Climb heading 191° to 820, then right turn heading 320° or as assigned by ATC, expect RADAR vectors to HAYGR, thence

TAKEOFF RUNWAY 30: Climb heading 301° to 820, then on heading 320° or as assigned by ATC, expect RADAR vectors to HAYGR, thence

.... on track 347° to MCRAY, maintain 3000 or as directed by ATC. Expect clearance to filed altitude within ten (10) minutes after departure.

MCRAY TWO DEPARTURE (RNAV) (MCRAY2.MCRAY) 150CT15

WASHINGTON, DC