

WOOLY TWO DEPARTURE (RNAV)

D-ATIS	134.85
CLINC DEL	
	135.7 317.8
CPDLC	
GNDCN	
	121.9 317.8 (E)
	121.625 348.6
DUILLES TOWER	
	120.1 317.8 (R)
	120.25 348.6 (F)
134.425	348.6
POTOMAC DEP	
	125.05 350.2

TAKEOFF MINIMUMS:
Rwys 1L/C/R, 19L/C/R
Standard with minimum
of 500' per NM to 820.

NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: RADAR required.
NOTE: Turbojets only.

DEPARTURE ROUTE DESCRIPTION


TAKEOFF RUNWAYS 1L/C/R: Climb heading 011° to 820, then on heading 011° or as assigned by ATC, expect RADAR vectors to RAZZA, thence
TAKEOFF RUNWAYS 19L/C/R: Climb heading 191° to 820, then right turn on heading 320° or as assigned by ATC, expect RADAR vectors to RAZZA, thence

TAKEOFF RUNWAY 30: Climb heading 301° to 820, then right turn on heading 320° or as assigned by ATC, expect RADAR vectors to RAZZA, thence

... on track 073° to WOOLY, then on assigned transition. Maintain 3000. Expect clearance to filed altitude within ten (10) minutes after departure.

AGARD TRANSITION (WOOLY2.AGARD)
BALTIMORE TRANSITION (WOOLY2.BAL)
SWANN TRANSITION (WOOLY2.SWANN)

NOTE: Chart not to scale.

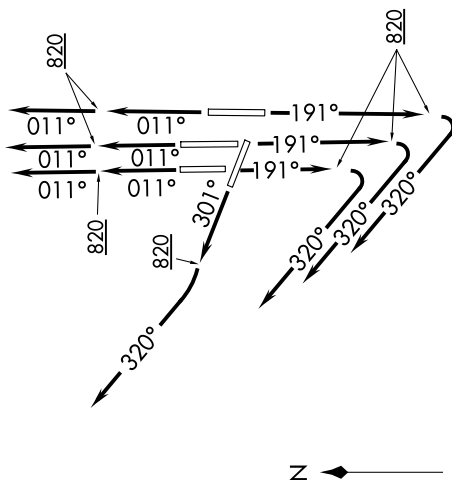

NOTE: Chart not to scale.

NE-3, 12 JUN 2025 to 10 JUL 2025