

LOC/DME I-ROF
111.15
Chan **48(Y)**

APP CRS
328°

Rwy Ldg
TDZE **705**
Apt Elev **712**

LOC RWY 33

AURORA MUNI (ARR)


⚠

For inop ALS, increase S-LOC 33 Cats C and D visibility to 1¼ SM and EPABE FIX minimums S-LOC 33 Cats C and D visibility to 1 SM.

MALSR


MISSED APPROACH: Climb to 1400 then climbing right turn to 3000 on heading 146° and JOT VOR/DME R-347 to VAINS INT/JOT 13 DME and hold, continue climb-in-hold to 3000.

ATIS 125.85	CHICAGO APP CON 133.5 349.0	AURORA TOWER★ 120.6 (CTAF) 0	GND CON 121.7	CINC DEL 121.7 (When tower closed)	UNICOM 122.95 123.5
-----------------------	---------------------------------------	--	-------------------------	---	-------------------------------

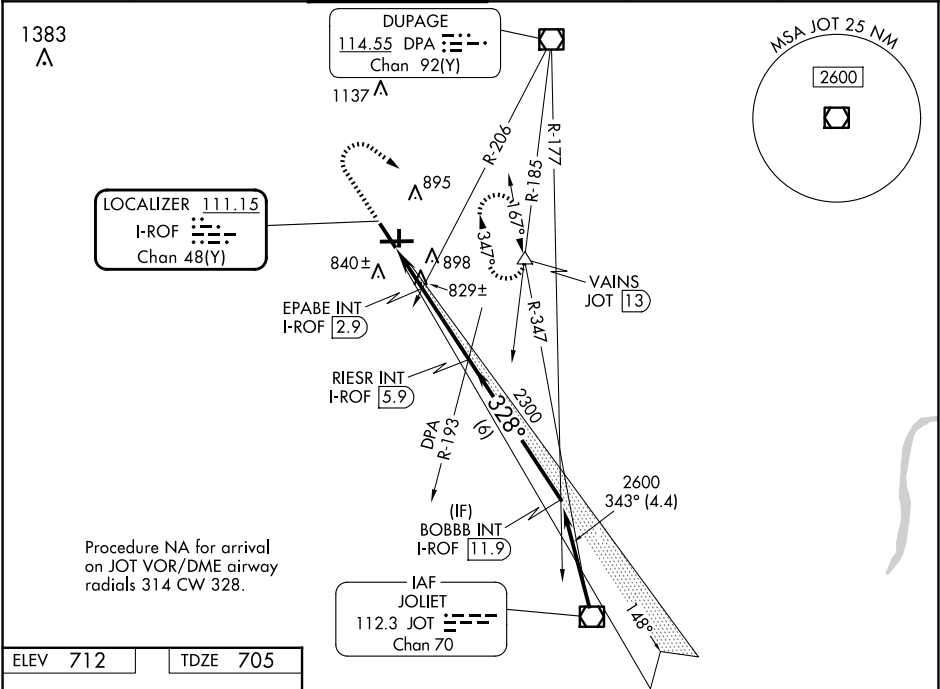

Procedure NA for arrival on JOT VOR/DME airway radials 314 CW 328.

ELEV 712	TDZE 705
-----------------	-----------------

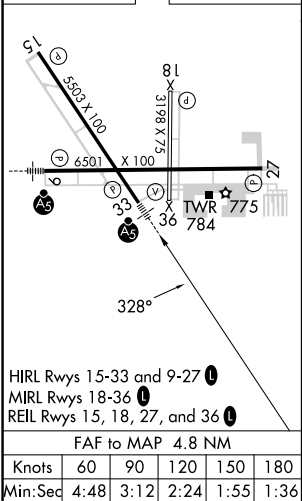

HIRL Rwy 15-33 and 9-27

MRL Rwy 18-36

REIL Rwy 15, 18, 27, and 36

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

	1400	3000	JOT R-347	VAINS	RIESR INT I-ROF 5.9	BOBBB INT I-ROF 11.9
			hdg 146°			
					EPABE INT I-ROF 2.9	
					I-ROF 1.1	I-ROF 2.1
					1320	2300
					3.04° TCH 48	2600
					1 NM	0.8 NM
					3 NM	6 NM
CATEGORY	A	B	C	D		
S-LOC 33	1320-½	615 (700-½)	1320-⅜	615 (700-⅜)		
CIRCLING	1320-1	608 (700-1)	1320-⅜	608 (700-⅜)	1320-2	608 (700-2)
EPABE FIX MINIMUMS (DUAL VOR RECEIVERS or DME REQUIRED)						
S-LOC 33	1080-½	375 (400-½)	1080-⅝	375 (400-⅝)		
CIRCLING	1200-1	488 (500-1)	1300-½	588 (600-½)	1320-2	608 (700-2)