

WAAS CH 77614 W01A	APP CRS 005°	Rwy Ldg TDZE Apt Elev	4003 410 420
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 1


WILLIAM M TUCK (W78)

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).
DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Danville altimeter setting and increase LPV DA to 739 feet and LNAV/VNAV DA to 785 feet and all MDA 100 feet; increase LPV all Cats visibility ¼ mile and LNAV/VNAV all Cats visibility and Circling Cat C visibility ¼ mile and LNAV Cat C visibility ½ mile. Night landing: Rwy 19 NA. Baro-VNAV and VDP NA when using Danville altimeter setting. Circling NA to Rwys 6-24.

MISSED APPROACH:
Climbing right turn to 3000 direct HARVY and hold.

AWOS-3 119.425	WASHINGTON CENTER 124.05 352.0	UNICOM 122.8 (CTAF)
--------------------------	--	-------------------------------

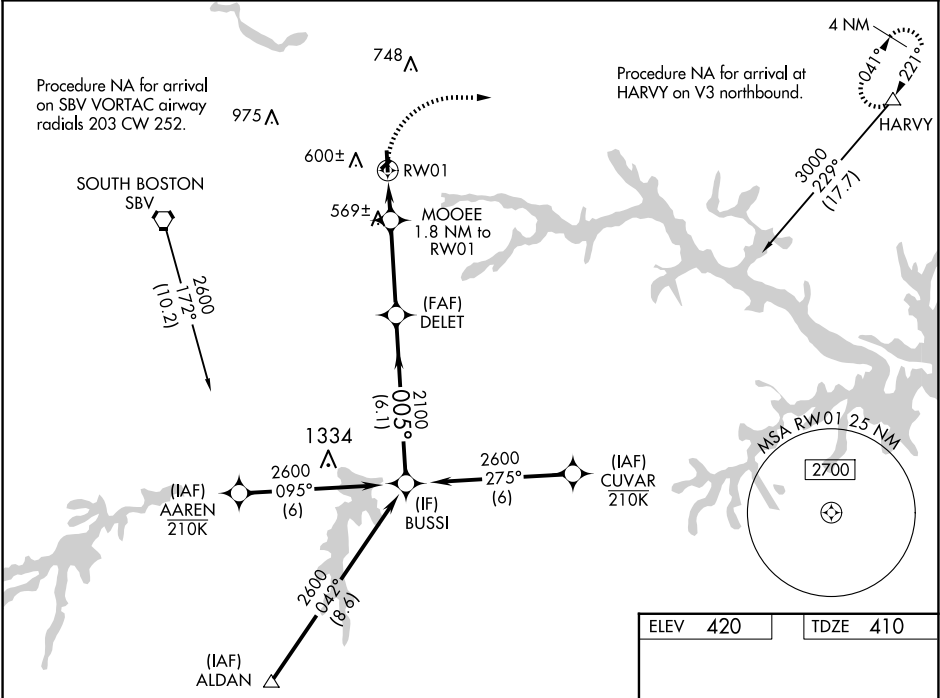

3000	HARVY				
*LNAV only.	*1.2 NM to RWY 01	*1000	DELET 2100	BUSSI 2600	GP 3.00° TCH 59
	1.2 NM	0.6 NM	3.4 NM	6.1 NM	
CATEGORY	A	B	C	D	
LPV DA	660-1	250 (300-1)		NA	
LNAV/VNAV DA	706-1	296 (300-1)		NA	
LNAV MDA	820-1	410 (400-1)	820-1 ¼ 410 (400-1 ¼)	NA	
CIRCLING	960-1	540 (600-1)	1060-1 ¾ 640 (700-1 ¾)	NA	

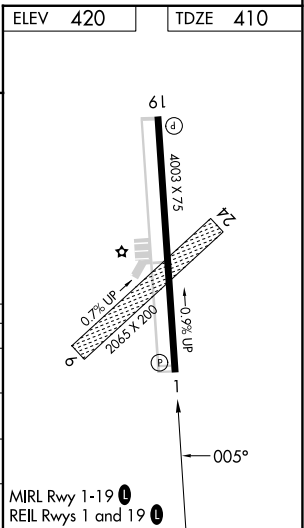

NE-3, 12 JUN 2025 to 10 JUL 2025

NE-3, 12 JUN 2025 to 10 JUL 2025