


LOC I-ECC 110.1	APP CRS 200°	Rwy Idg TDZE Apt Elev	8653 5605 5622
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 20
CEDAR CITY RGNL(CDC)

DME required.	MALSR	MISSED APPROACH: Climb to 6200 then climbing right turn to 10000 on heading 322° and on EHK R-278 to BERYL INT/EHK 16.5 DME and hold, continue climb-in-hold to 10000. † Missed approach requires minimum climb of 210 feet per NM to 7300.
▼ XJOJO fix minimums (Dual VOR receivers required): For inop ALS, increase S-LOC 20 Cats C/D visibility to 1½ SM. For inop ALS, increase S-LOC 20 Cats C/D visibility to 2½ SM. #For inop ALS, increase S-ILS 20 visibility all Cats to 1 SM.	AS	

ASOS 119.025	SALT LAKE CITY CENTER 125.575 379.275	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

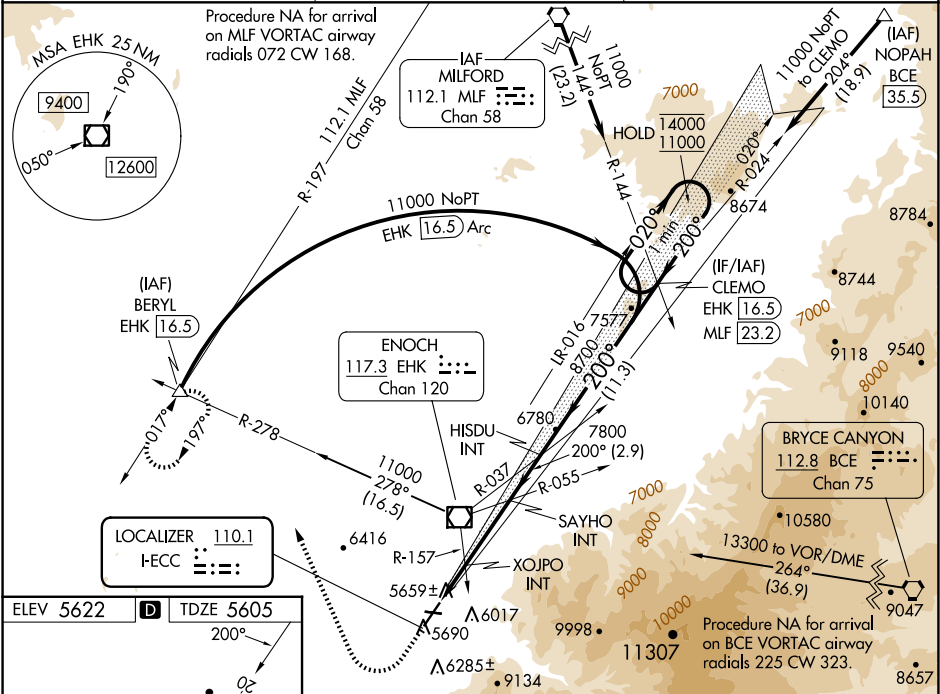

ELEV 5622	TDZE 5605
LOCALIZER 110.1 I-ECC	
HIRL Rwy 2-20	MIRL Rwy 8-26
REIL Rwy 2, 8 and 26	
FAF to MAP 6.7 NM	
Knots 60 90 120 150 180	
Min:Sec 6:42 4:28 3:21 2:41 2:14	

6200 10000	EHK R-278	BERYL	CLEMO EHK 16.5	One Minute Holding Pattern
*LOC only		SAYHO INT		
	XJOJO INT	7800		
	6440*	7800		
	2.4 NM	4.3 NM	2.9 NM	11.3 NM
CATEGORY	A	B	C	D
S-ILS 20†		5825-½	220 (300-½)	
S-ILS 20 #		5882-½	277 (300-½)	
S-LOC 20	6440-½ 835 (900-½)	6440-¾ 835 (900-¾)	6440-1⅞ 835 (900-1⅞)	
XJOJO FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 20	6100-½	495 (500-½)	6100-1	495 (500-1)