WAAS CH 90417 W11A	APP CRS 114°	Rwy ldg 8099 TDZE 539 Apt Elev 544

RNAV (GPS) RWY 11
ST LOUIS RGNL (ALN)

RNP APCH.

Rwy 11 helicopter visibility reduction below ¾ SM NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH:
Climb to 2100 direct QUNIE and hold.

ATIS	ST LOUIS APP CON	REGIONAL TOWER*	GND CON	CLNC DEL	UNICOM
128.0	124.2 353.9	126.0 (CTAF) L 239.0	120.2	120.2 (when tower closed)	122.95

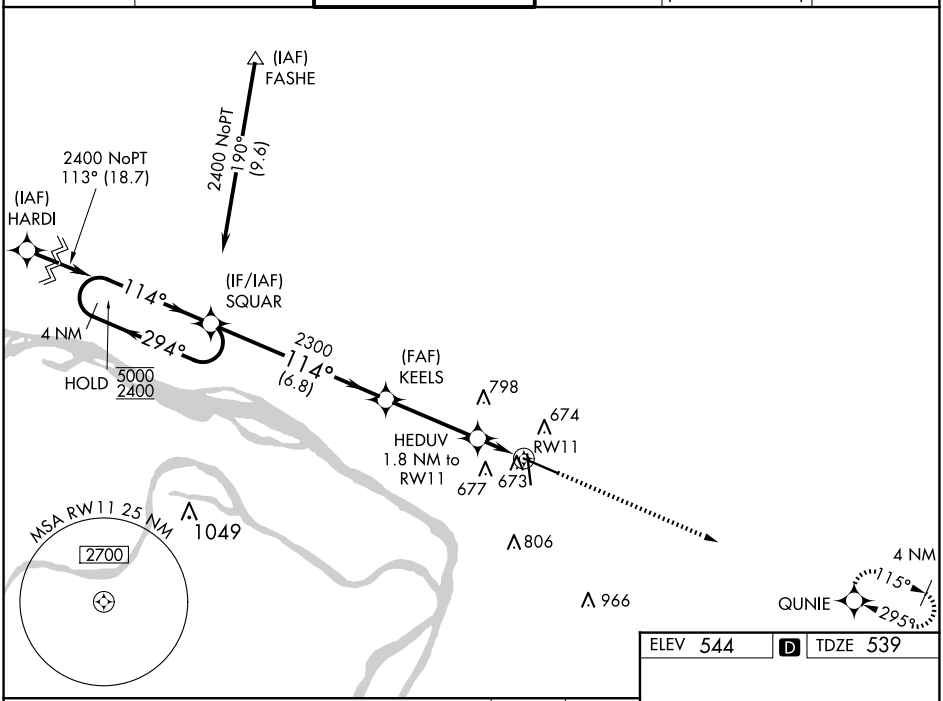

ELEV 544 D TDZE 539

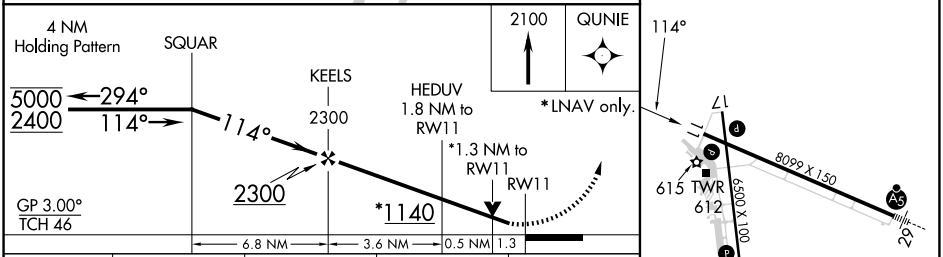

CATEGORY	A	B	C	D
LPV DA	794-⅞ 255 (300-⅞)			
LNAV/VNAV DA	881-1⅛ 342 (400-1⅛)			
LNAV MDA	980-1 441 (500-1)		980-1⅜ 441 (500-1⅜)	
CIRCLING	1000-1 456 (500-1)		1160-1¾ 616 (700-1¾)	1200-2 656 (700-2)

REIL Rwy 11 L
HIRL Rwy 11-29 L
MIRL Rwy 17-35 L

EC-3, 12 JUN 2025 to 10 JUL 2025
EC-3, 12 JUN 2025 to 10 JUL 2025