

WAAS
CH **65705**
W03A

APP CRS
027°

Rwy ldg
TDZE **996**
Apt Elev **996**



RNAV (GPS) RWY 3

TOCCOA RG LETOURNEAU FLD (TOC)

Baro-VNAV and VDP NA when using Gainesville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Gainesville altimeter setting and increase LPV DA to 1507 feet, LNAV/VNAV DA to 1859 and all MDA 120 feet. Increase LPV all Cats visibility ⅓ mile, increase LNAV Cat B visibility ¼ mile, Cats C/D ½ mile and Circling Cats A/B/C visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 6600 direct EBANE and hold, continue climb-in-hold to 6600.

AWOS-3 119.625	ATLANTA CENTER 134.8 379.95	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

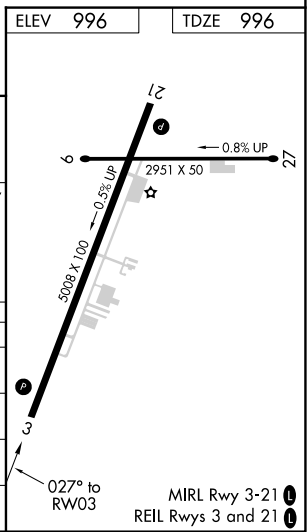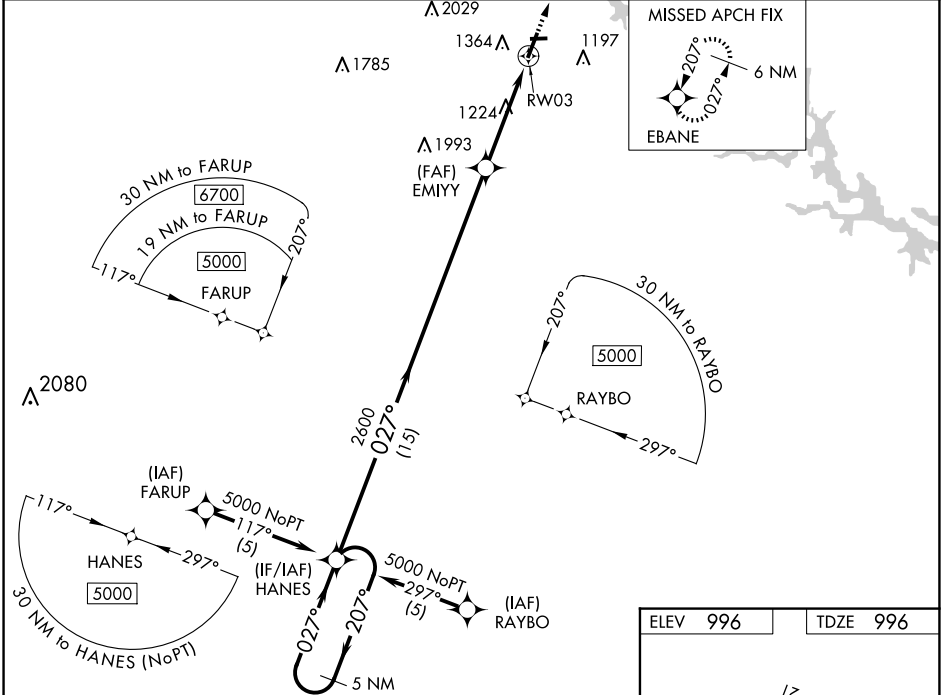

5 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.25/TCH 32).		6600	EBANE
5000		2600		*1.9 NM to RW03	
GP 3.44° TCH 40		2600		*LNAV only	
15 NM		2.4 NM		1.9 NM	
CATEGORY	A	B	C	D	
LPV DA	1392-1⅓ 396 (400-1⅓)			NA	
LNAV/VNAV DA	1744-2½ 748 (800-2½)			NA	
LNAV MDA	1680-1 684 (700-1)		1680-2 684 (700-2)		
CIRCLING	1720-1 724 (800-1)		1760-2¼ 764 (800-2¼)		2480-3 1484 (1500-3)