

EC-3, 12 JUN 2025 to 10 JUL 2025

TOP ALTITUDE:  
ASSIGNED BY ATC

TAKEOFF MINIMUMS

Rwys 12L/R, 23, 30R: Standard.

Rwy 5: 200-1/4 or standard with minimum climb of 343' per NM to 700.


Rwy 30L: 400-2 1/2 or standard with minimum climb of 220' per NM to 900,

or alternatively, with standard takeoff minimums and a normal 200'

per NM climb gradient, takeoff must occur no later than 2100'

prior to DER.

ATIS 121.45  
CLNC DEL 118.275  
GND CON 121.8 (when tower closed)  
DOWNTOWN TOWER \* 119.925 379.3  
ST LOUIS DEP CON 123.7 371.875

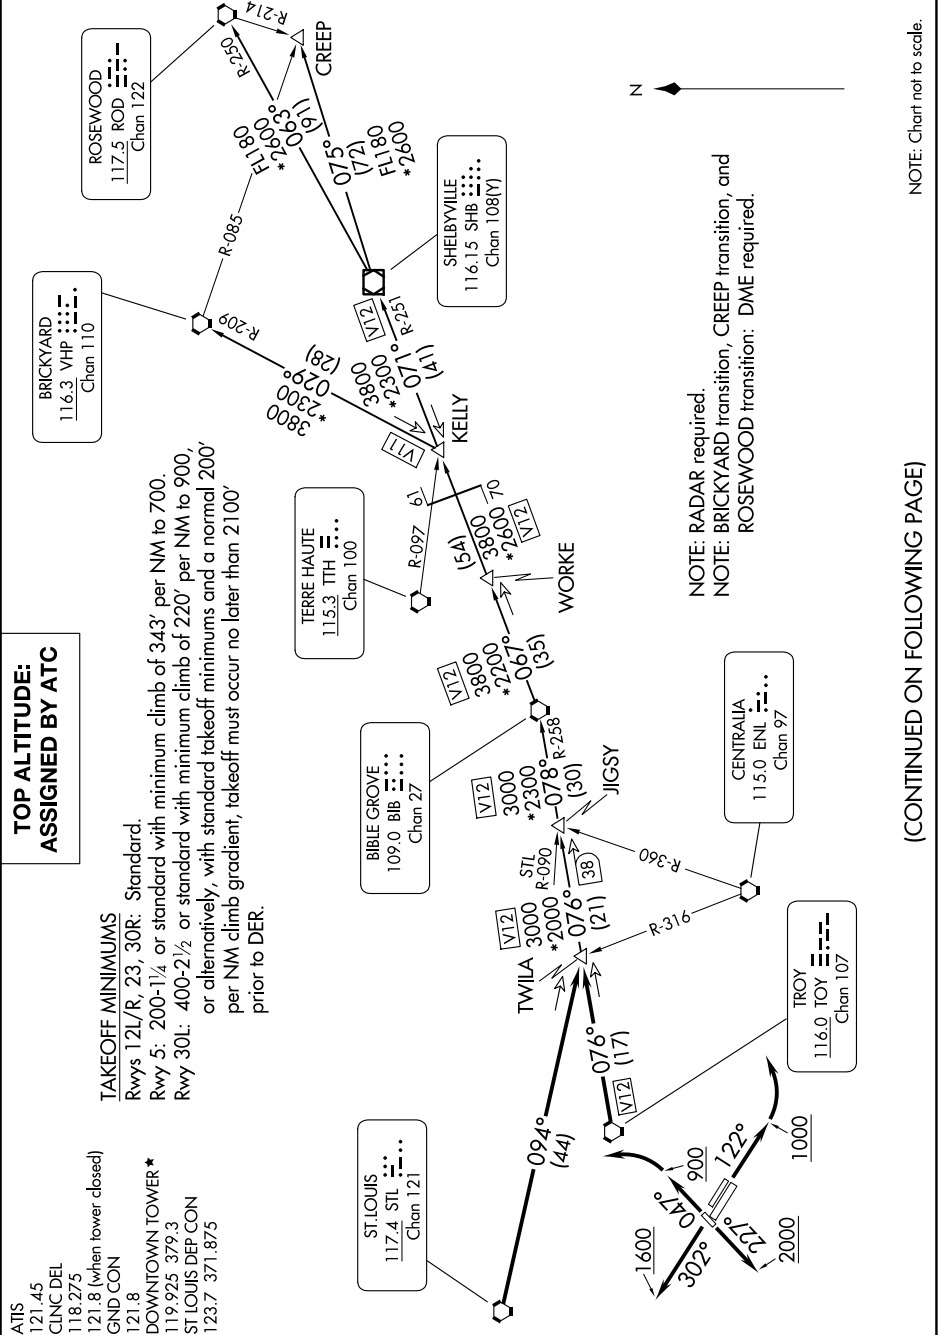

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

EC-3, 12 JUN 2025 to 10 JUL 2025