


VOR/DME FFM	APP CRS	Rwy Ldg	5639
110.4	115°	TDZE	1182
Chan 41		Apt Elev	1183

VOR RWY 13

FERGUS FALLS MUNI/EINAR MICKELSON FLD (FFM)

V NA When local altimeter setting not received, use Elbow Lake altimeter setting and increase all MDAs 60 feet; increase Circling Cat C/D visibility ¼ SM. EBABY fix minimums increase S-13 Cat C/D and Circling Cat C/D visibility ¼ SM.	MISSED APPROACH: Climb to 3000 then left turn direct FFM VOR/DME and hold.
--	--

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
119.05	126.1 269.2	122.8 (CTAF) 0

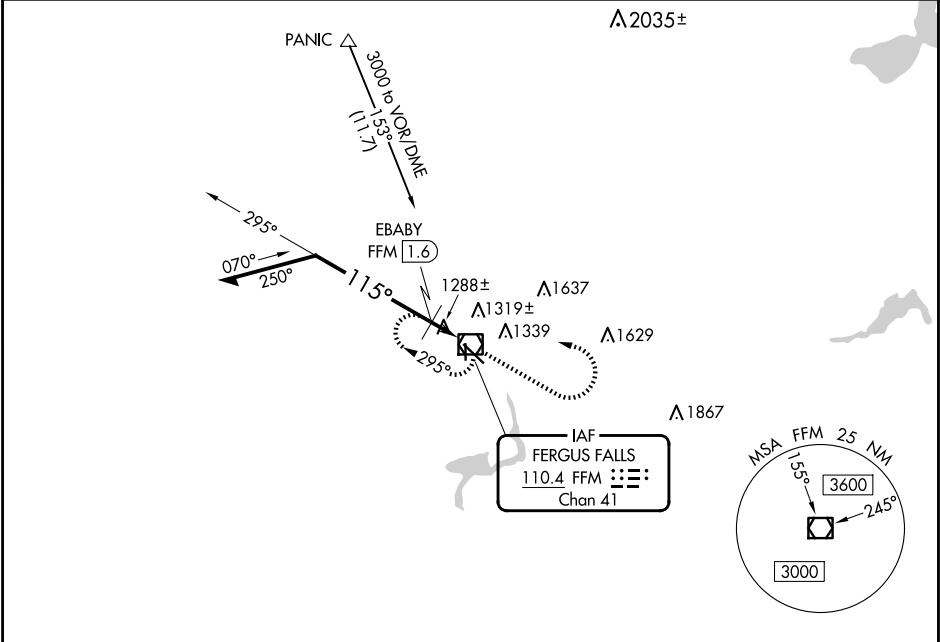

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 52).		ELEV 1183		TDZE 1182	
Remain within 10 NM		3000		FFM	
2900		EBABY FFM 1.6		*1700 when using Elbow Lake altimeter setting.	
295°		2.75° TCH 50		1.6 NM	
115°		*1640		3299 X 75	
CATEGORY		A		B	
S-13		1640-1		458 (500-1)	
CIRCLING		1640-1		557 (600-1)	
EBABY FIX MINIMUMS		1580-1		398 (400-1)	
S-13		1640-1		557 (600-1)	
CIRCLING		1640-1		557 (600-1)	
FERGUS FALLS, MINNESOTA		FERGUS FALLS MUNI/EINAR MICKELSON FLD (FFM)		VOR RWY 13	
Amdt 1B 24MAR22		46°17'N-96°09'W			

