


NC-3, 12 JUN 2025 to 10 JUL 2025

TOP ALTITUDE:
(JETS) 3000/(PROPS) 2500

ATIS
134.8
CLNC DEL
133.1
ST LOUIS CLNC DEL
(when tower closed)
121.7
GND CON
121.7
SPIRIT TOWER ★
124.75 257.2
ST LOUIS DEP CON
126.5 254.3

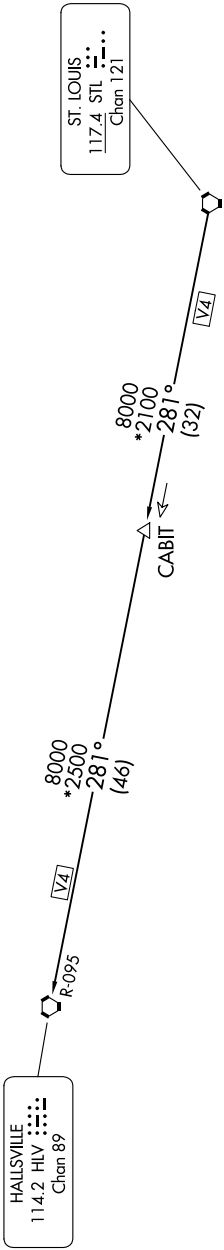

NOTE: DME and RADAR required.

DEPARTURE ROUTE DESCRIPTION
Climb on assigned heading for vector to appropriate route.

JETS: Maintain 3000 or assigned altitude, thence
PROPS: Maintain 2500 or assigned altitude, thence
. . . . (transition). Expect filed altitude 10 minutes after departure.
HALLSVILLE TRANSITION [OZARK8.HLV]: From over STL VORTAC on STL R-281 to CABIT, then on STL R-281 and HLV R-095 to HLV VORTAC.

TAKEOFF MINIMUMS
Rwys 8L 26R: Standard.
Rwy 8R: 200-1½ or standard with minimum climb of 238' per NM to 700.
Rwy 26L: 300-2 or standard with minimum climb of 231' per NM to 900.

NOTE: Chart not to scale.