

WAAS CH 82026 W04A	APP CRS 044°	Rwy Idg 5000 TDZE 1664 Apt Elev 1664
--	------------------------	---

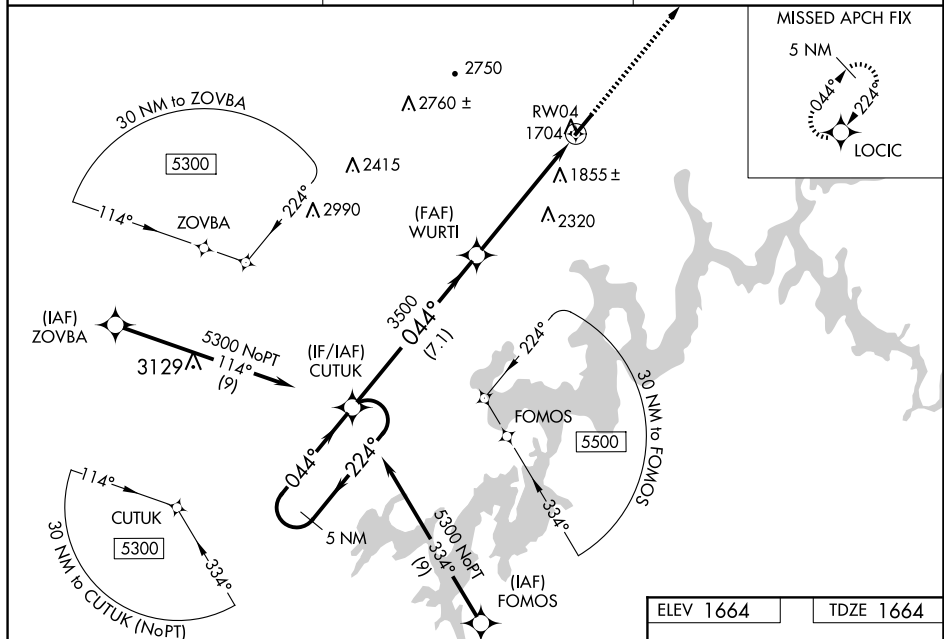
RNAV (GPS) RWY 4
ROCKWOOD MUNI (RKW)

NA Baro-VNAV NA when using Crossville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 33°C (91°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Crossville altimeter setting: increase DA to 1989 feet and LPV and LNAV/VNAV visibility all Cats ¼ SM, increase all MDA 80 feet and LNAV Cat C and D visibility ⅓ SM and Circling Cat C visibility ½ SM.

MISSED APPROACH: Climb to 5600 direct LOCIC and hold, continue climb-in-hold to 5600.

AWOS-3
118.775

ATLANTA CENTER
133.6 254.3

UNICOM
122.8 (CTAF) 

5 NM Holding Pattern	VGSI and RNAV glidepath not coincident CUTUK (VGSI Angle 3.00/TCH 26).
-------------------------	---

5600	LOCIC
------	-------

5300

GP 3.00°

CATEGORY	A	B	C	D
LPV DA	1914- $\frac{3}{4}$ 250 (300- $\frac{3}{4}$)			
LNAV/VNAV DA	1914- $\frac{3}{4}$ 250 (300- $\frac{3}{4}$)			
LNAV MDA	2100-1	436 (500-1)	2100-1 $\frac{3}{8}$	436 (500-1 $\frac{3}{8}$)
CIRCLING	2100-1 436 (500-1)	2200-1 536 (600-1)	2260-1 $\frac{1}{2}$ 596 (600-1 $\frac{1}{2}$)	2780-3 1116 (1200-3)

